

C4i

Consultants for Industry



C4i
ul. Batalionu Platerówek 3, bud. B-7, I p.
03-308 Warszawa, Polska
+48 22 398 33 42, +48 22 390 62 36
biuro@c4i.com.pl c4i.com.pl

User Manual

CE-DA12-H2 1x2 HDMI 2.0 Splitter



All Rights Reserved
Version: CE-DA12-H2_2020V1.3

Statement

Thanks for purchasing this product, please read this user manual carefully before using this product. The functions described in this version are updated till April, 2020. In the constant effort to improve our product, we reserve the right to make functions or parameters changes without notice or obligation.

Safety Precaution

- Do not dismantle the housing or modify the module to avoid electrical shock or burn.
- Using supplies not meeting the products' specifications may cause damage, deterioration or malfunction.
- Do not expose the unit to rain, moisture or install this product near water.
- Install the device in a place with fine ventilation.
- Do not twist or pull by force ends of the optical cable. It can cause malfunction.
- Do not use liquid or aerosol cleaners to clean this unit.
- Always unplug the power to the device before cleaning.
- Unplug the power when not used for a long period of time.
- Refer all servicing to qualified service personnel.

After-sales Service

We provide limited warranty for the product within three years.

Packing List

- 1x 1x2 HDMI 2.0 Splitter
- 1x Power Adapter (5V DC 1A)
- 1x User Manual

Note: Please contact your distributor immediately if any damage or defect in the components is found.

PRODUCT INTRODUCTION

Thanks for choosing the 1x2 HDMI 2.0 Splitter, which can distribute one HDMI input to two outputs. The splitter supports HDMI video resolution up to 4K@60Hz 4:4:4 and supports passing EDID information from the display, there is a built-in Down-scaling setting can be selected by the 2-pin DIP switch on the front panel. Moreover, the splitter supports convenient firmware upgrade through Micro-USB port.

FEATURES

- Supports up to 4K/60Hz 4:4:4, HDR10 and Dolby Vision.
- HDCP 2.3 compliant.
- Built-in signal equalizer, provides capability to use longer range HDMI cable.
- EDID copy priority follows Output1>Output2.
- Supports 4K to 1080p down-scaling for each independent output, the 4K input can be automatically degraded to 1080p output for compatibility with 1080p displays.
- Scaler mode selection by front panel 2-pin switch.
- Supports CEC.
- Convenient firmware upgrade

PANEL DESCRIPTION




- **POWER LED:** The LED illuminates red when power is applied.
- **INPUT LED:** The LED illuminates blue when there is HDMI input.
- **INPUT:** Type-A female HDMI input port to connect the HDMI source.
- **SCALER ON/OFF:** Turn on or off the down-scaling function.
- **FW:** Micro-USB port for firmware upgrade.
- **OUTPUT LEDS:** Two LEDs illuminate blue when there are HDMI outputs.
- **OUTPUTS:** Two Type-A female HDMI output ports to connect HDMI displays

VIDEO RESOLUTION DOWN-SCALING

The product supports video resolution down-scaling, the 4K input can be automatically degraded to 1080p output for compatibility with 1080p display, shown in the below chart.

#	Input			Output	
	Resolution	Refresh	Color Space	Downscale	1080p Specs
1	3840x2160	60	4:4:4	Support	1080p@60Hz 4:4:4
2	3840x2160	30	4:4:4	Support	1080p@30Hz 4:4:4
3	3840x2160	24	4:4:4	Support	1080p@24Hz 4:4:4
4	3840x2160	60	4:2:0	Support	1080p@60Hz 4:4:4
5	3840x2160	30	4:2:0	Support	1080p@30Hz 4:4:4
6	3840x2160	24	4:2:0	Support	1080p@24Hz 4:4:4
7	3840x2160	60	4:2:2	Not Support	N/A
8	3840x2160	30	4:2:2	Not Support	N/A
9	3840x2160	24	4:2:2	Not Support	N/A

SYSTEM CONNECTION

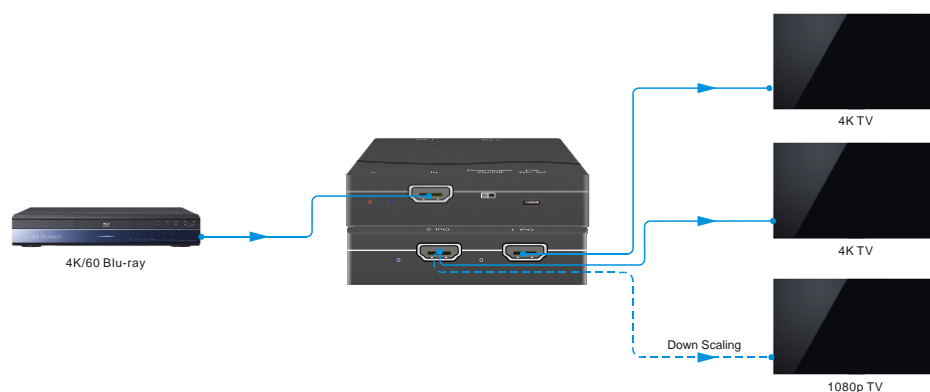

FIRMWARE UPGRADE

Please follow the below steps to upgrade firmware by the Micro-USB port:

- 1) Connect the splitter to the PC with USB cable.
- 2) Power on the splitter, and then the PC will automatically detect a U-disk named of "BOOTDISK".
- 3) Double-click to open the U-disk, a file named of "READY.TXT" will be showed.
- 4) Copy the latest upgrade file (.bin) to the "BOOTDISK" U-disk directly.

- 5) If the filename "READY.TXT" automatically turns to "SUCCESS.TXT", the firmware was upgraded successfully. If the firmware upgrade failed, please check the file (.bin) and then follow the above procedure to operate again.
- 6) Remove the USB cable after firmware upgrade.

Specification

Video Input	
Input	(1) HDMI
Input Connector	(1) Type-A female HDMI
HDMI Input Resolution	Up to 4K@60Hz 4:4:4 8bit
HDMI Standard	2.0
HDCP Version	up to HDCP2.3
CEC	Supported
Video Output	
Output	(2) HDMI
Output Connector	(2) Type-A female HDMI
HDMI Output Resolution	Up to 4K@60Hz 4:4:4
CEC	Supported
Control	
Control Part	(1) Micro-USB port
General	
HDMI 2.0 Cable Length	4K@60Hz 4:4:4 ≤ 5m, 4K@60Hz 4:2:0 ≤ 10m, 1080p ≤ 15m
Operation Temperature	-10°C ~ +55°C
Storage Temperature	-25°C ~ +70°C
Relative Humidity	10%-90%
Power Supply	Input:100V~240V AC; Output: 5V DC 1A
Power Consumption	1.8W
Dimension (W*H*D)	85mm x 18mm x 85mm
Net Weight	70g

Note: Please adopt high-qualified HDMI cable fully compliant with HDMI 2.0 for reliable transmission and connection. User may disable the CEC function on the setting of display or source device in case there is crosstalk of CEC control.



<http://c4i.com.pl>