

U S E R M A N U A L

HDMI V2.0 SWITCH 3x1

Enjoy the vivid world!


INTRODUCTION

The 3- Port HDMI switch allows 3 HDMI ports to be switched to a single display terminal via remote control or buttons on unit. This HDMI Switch supports video formats including 720p, 1080i , 1080p, 4K/30HZ, 4K/60HZ.

FEATURES

- Support 6x3Gbps data rate for tmds clock up to 600MHz
- Support HDMI 4K 60HZ
- Support 3D
- Supports highest video resolution 4K/60Hz
- Support HDR
- Support 24/30/36 bit deep color
- Support AWG26 HDMI standard cable,Input up to 8metres ,output up to 8metres (4K/30Hz resolution and below)
- Support 2.0 HDMI standard cable, input up to 3 meters, output up to 5 meters (4K/60Hz resolution)
- Supports single high definition display for multiple sources, such as DVD Players, PS4 and HD players, Set Top Boxes

Product Photos

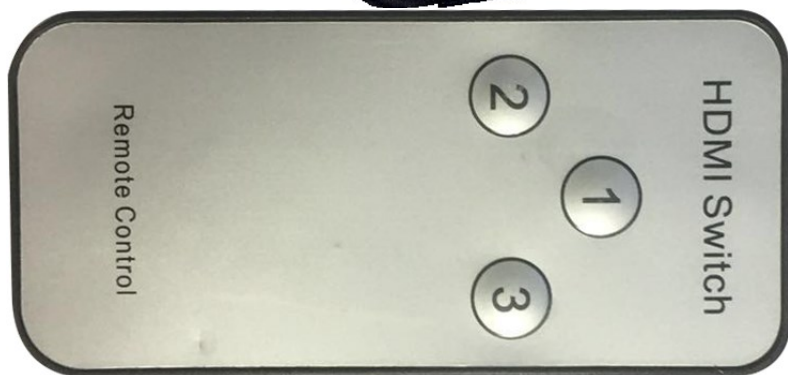

SPECIFICATIONS

HDMI version	HDMI 2.0b
HDMI resolution	Up to 4K/60Hz
Support video format.....	3D
Support video color format	24/30/36 bit deep color
Support audio format.....	DTS-HD/Dolby-trueHD/DTS/Dolby-AC3/DSD
Max bandwidth.....	600MHz
Max baud rate.....	6X3Gbps
Input cable distance.....	≤8m AWG26 HDMI standard cable under 4K/30Hz; ≤3m 2.0 HDMI standard cable in 4K/60Hz
Output cable distance.....	≤8m AWG26 HDMI standard cable in 4K/30Hz; ≤5m 2.0 HDMI standard cable in 4K/60Hz
Operating Temperature range.....	(-10 to +55°C)

Operating and Connecting

1. Connect HD signal sources into HDMI switch input with 3 HDMI cables
2. Connect 1 HDMI display source into HDMI switch output with 1 HDMI cable
3. Connect the switcher with usb cable for charging if you need.

Package Accessories

1. HDMI switcher
2. IR remote control