

4 Way VGA+PC Audio Splitter With Booster

The 4 Way VGA+PC Audio Splitter With Booster allows a single PC to drive up to four VGA monitors a distance of up to 100 m, with the use of appropriate video-grade cabling.

There is no software to install and no problems with software compatibility.

SPECIFICATIONS

VGA:


- Video Bandwidth: >500MHz
- Supported Resolutions: VGA, SVGA, XGA, SXGA,UXGA, QXGA, WUXGA, WQXGA
- Supports the DDC,DDC2,DDC2B. (For VGA Output1)
- Extended Distance:60 Meters(VGA Output 1,2) / 100 Meters(VGA Output 3,4)
- Gain and EQ Adjustments. (For VGA Output 3,4)
- Input/Output Connector:HD-15 Female
- Can be cascaded.

Audio:

- Operation Frequency:50Hz~15KHz
- Input Impedance: 47K ohms
- Max. Audio Input:5Vp-p
- Extended Distance:100 Meters
- Input/Output Connector:3.5mm Mini-stereo Jack
- Can be cascaded.

Power & Dimensions:

- Power Consumed: 100mA Max
- Power Source: DC 12 Volts
- Size (LxWxH): 205 mm x 93.5 mm x 31 mm
- Net Weight (Unit only): 0.46 Kg

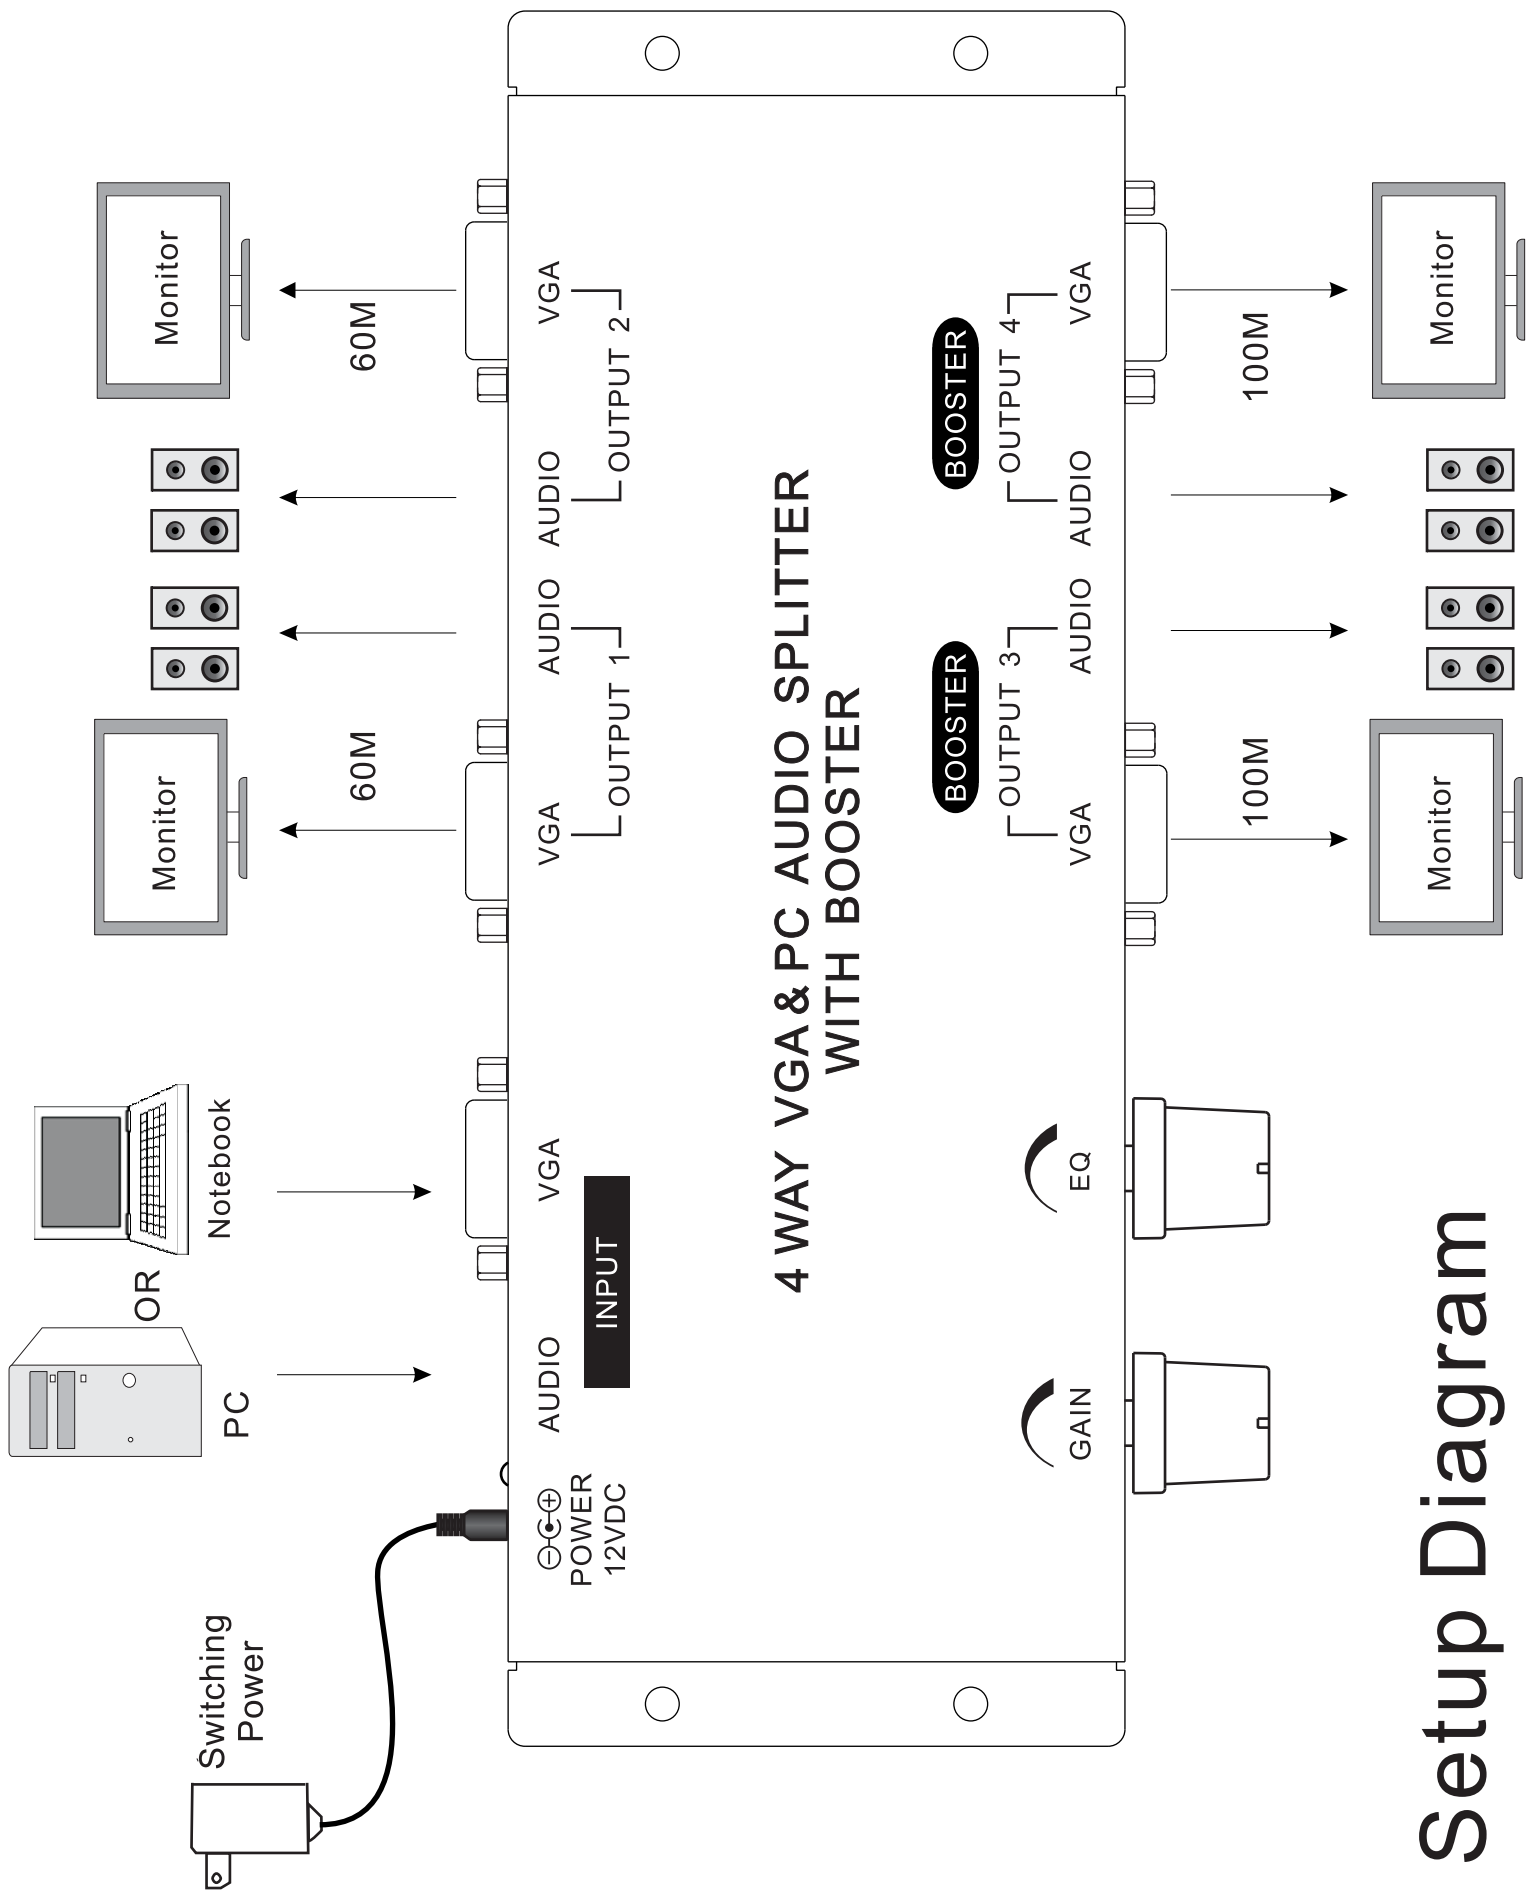

Setup Diagram