

F5

PRO V4



Touch Screen

Custom 3D LUT

# 6" ON-CAMERA MONITOR

Sony F970 External Install and Power Kit  
Designed to simplify and improve video creation




- 1920x1080  
FHD Resolution
- Touch  
Screen
- 3D  
LUT  
Custom  
3D LUT
- 4K  
4K HDMI  
In & Out
- 5V Type-C  
Power Supply
- DC  
OUT  
Power  
for Camera
- External Install and  
Power Design

## >> FEATURES

- 6-inch 1920x1080 full HD IPS screen
- Touch screen and intuitive button operation, meet different needs.
- Supports 3D LUT Log to REC.709 and user 3D LUT upload (up to 32)
- Sony F970 external install and power kit design can be used to install and supply power to external equipment, easy to install and disassemble, simplify your photography equipment.
- With Waveform, Vectorscope, RGB Histogram, Focus Assist, Monochrome etc. functions, can help you accurately exposure and focus every shot.
- Multiple power supply modes, DC IN 12V, Type-C 5V and NP-F battery slot
- Stereo Earphone output
- DC 8.4V power out to power your DSLR camera or mirrorless camera



## >> USE PROFESSIONAL REC.709 COLOR CALIBRATION STANDARD

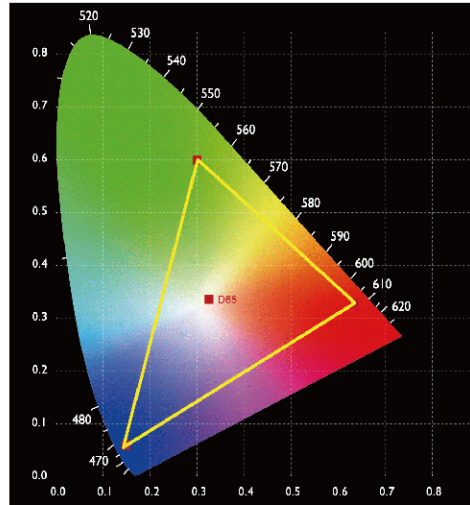

## >> PROFESSIONAL AND RICH AUXILIARY FUNCTIONS

- |              |          |              |            |                 |                |
|--------------|----------|--------------|------------|-----------------|----------------|
|              |          |              |            |                 |                |
| 3D LUT       | Waveform | Vector Scope | Histogram  | Anamorphic Mode | Peaking Filter |
|              |          |              |            |                 |                |
| False Colors | Exposure | Zoom-in      | Image Flip | Embedded Audio  | Nine Grid      |


## >> MULTIPLE POWER SUPPLY MODE







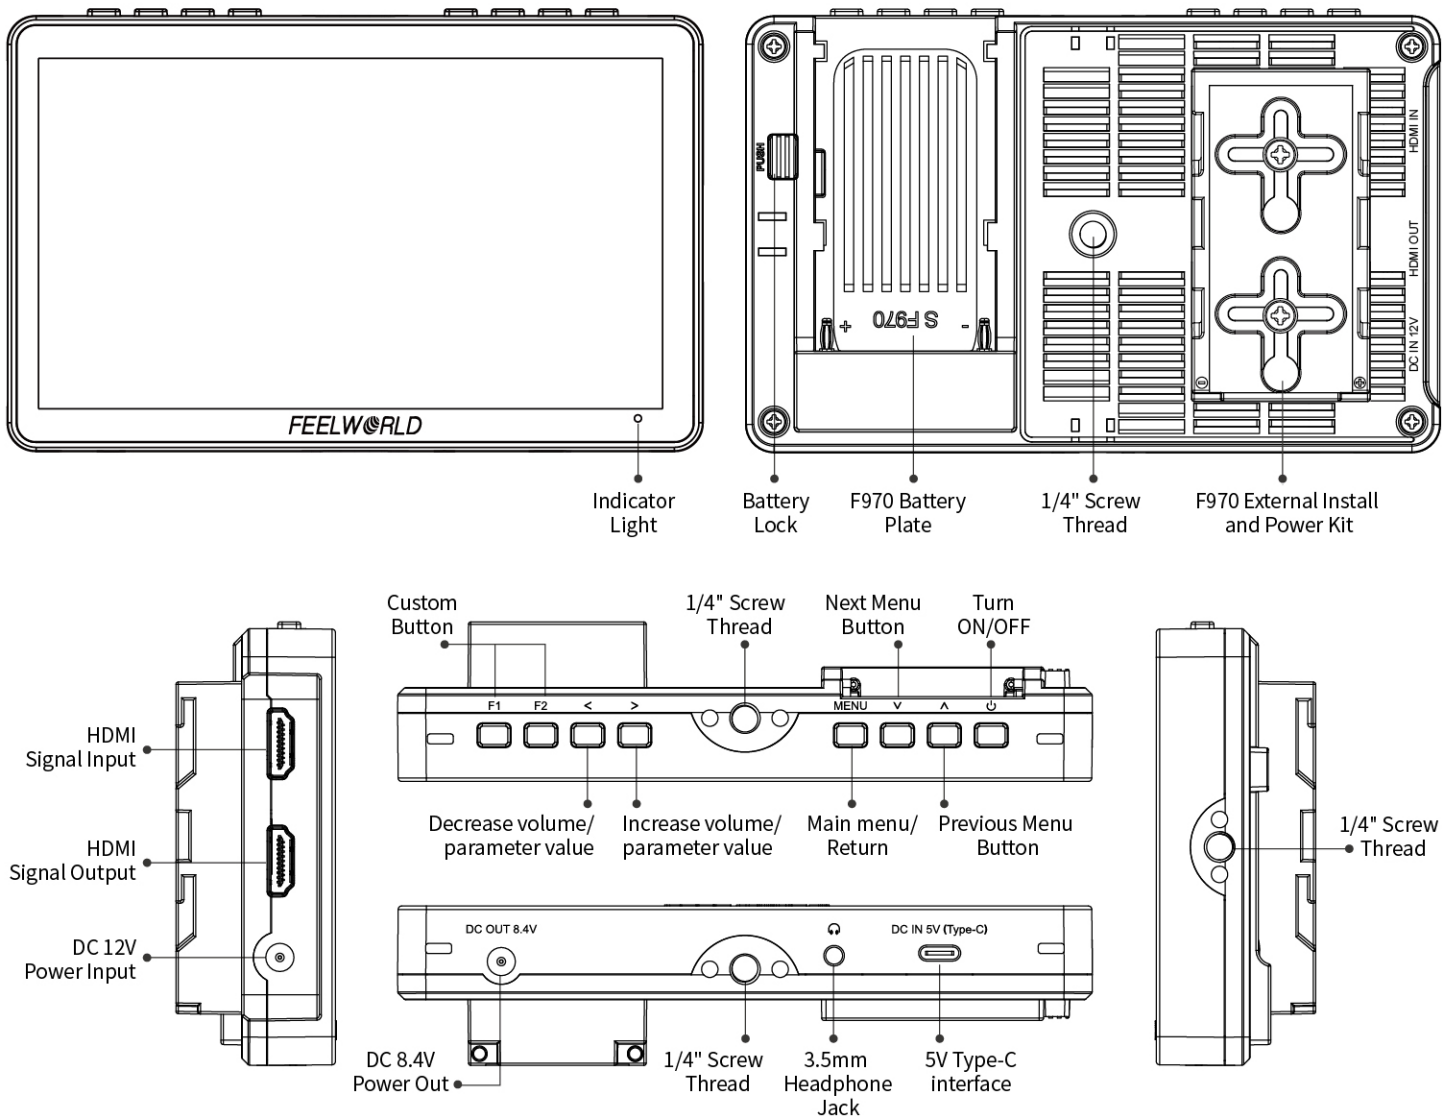


## >> PARAMETER

Description	6" FHD HDMI Touch Screen On-camera 3D LUT Monitor with F970 Install and Power Kit
Model	F5 Pro V4
Screen size	6" IPS
Display Colors	16.7M (8 bit)
Resolution	1920x1080 pixels
Dot pitch	0.069 (H) × 0.069 (W) mm
Aspect Ratio	16:9
Brightness	450cd/m <sup>2</sup>
Contrast	1000:1
Backlight	LED
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Input	HDMI
Output	HDMI
Audio	3.5mm Stereo Headphone
Power In	DC IN 12V, Barrel (5.5mm outer, 2.1mm inner), DC IN 5V (Type-C)
Power Out	DC OUT 8.4V, Barrel (5.5mm outer, 2.1mm inner; Power DSLR or mirrorless camera)
HDMI Support Format	480i/576i/480p/576p
	1080i (60/59.94/50)
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)
	4K UHD 3840 × 2160p (30/29.97/25/24/23.98Hz), 4096 × 2160p (24Hz)
Power Consumption	≤8W
Input Voltage	DC7~24V
Power Connector	DC
Battery Plate	F970 Battery Plate
Operating Temperature	-20°C ~ 50°C
Storage Temperature	-30°C ~ 60°C
Install Way	¼-20 thread points (top, bottom, right, middle back)
Unit Size	148Lx93Hx21.75D (mm)
Unit Weight	245g (with F970 install and power kit)

# >> STRUCTURE



# >> PACKING LIST

 <p>Monitor</p>	 <p>Micro HDMI Cable</p>	 <p>Tilt Arm</p>	 <p>Sunshade</p>
 <p>Type-C to USB</p>	 <p>Disassemble Wrench</p>	 <p>User Manual</p>	



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2672627

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn