



*The absolute opposite of ordinary*

## G804 Quad Channel Edge Blender Datasheet

***Input: up to 7680\*1200 @30hz, 4096\*2160 @60hz***

***4:4:4 full color sampling***

***Output: 2048\*1080 @60Hz***



## Table of Contents

<b>Introduction.....</b>	<b>3</b>
<b>Specification.....</b>	<b>4</b>
<b>Function and Features.....</b>	<b>5</b>
<b>Other features.....</b>	<b>7</b>
<b>Selectable Grid pattern for geometry Alignment.....</b>	<b>7</b>
<b>Selectable grid pattern size for geometry alignment.....</b>	<b>7</b>
<b>4k/60 daisy chain connection.....</b>	<b>8</b>
<b>Image geometry alignment and warp.....</b>	<b>8</b>
<b>Edge blending on flat and curved screen.....</b>	<b>9</b>
<b>Corner wall alignment and display.....</b>	<b>9</b>
<b>Linearity Grid Line Adjustment.....</b>	<b>11</b>
<b>Immersive display.....</b>	<b>12</b>
<b>Big scale display.....</b>	<b>12</b>
<b>Flexible display.....</b>	<b>13</b>
<b>Independent RGB Gamma.....</b>	<b>13</b>
<b>White balance &amp; Color correction.....</b>	<b>14</b>
<b>Image flip and rotation.....</b>	<b>14</b>
<b>Black level uplift.....</b>	<b>15</b>
<b>Stretch image and change aspect ratio.....</b>	<b>16</b>
<b>Image stacking.....</b>	<b>16</b>
<b>Edge mask.....</b>	<b>17</b>
<b>Scaler switcher and format conversion.....</b>	<b>18</b>

### Disclaimer/Copyright Statement

Copyright 2018, VNS Inc. All Right Reserved

This information contained in this document is protected by copyright. All rights are reserved by VNS Inc. VNS Inc. reserves the right to modify this document without any obligation to notify any person or entity of such revision. Copying, duplicating, selling, or otherwise distributing any part of this document without signing a non-disclosure agreement with an authorized representative of VNS Inc. is prohibited. VNS Inc. makes no warranty for the use of its products and bears no responsibility for any error of omission that may appear in this document. Product names mentioned herein are used for identification purposes only and may be trademarks of their respective companies.

## Introduction

G804 is designed with two processing modules of G802. It can serve as one quad channel processor or two independent dual channel processors. It is designed for professional curved screen edge blending as well as image warping, stacking, projection mapping...etc.

8 inputs (4x HDMI, 2x DP, 2x VGA) and 4x HDMI outputs are designed in G804. Input supports up to 7680\*1200 @30Hz, 4096\*2160 @60Hz with 4:4:4 full color sampling. Output supports up to 2048\*1080 @60Hz. It is integrated with 10-bit high end processor, motion adaptive de-interlace, low angle smooth algorithm, 3:2:2:2 pull-down and supports non-VESA standard input timing for connecting with various input sources.


Advanced warp technology is embedded in G804. User can use IR controller or WebGui to perform edge blending and sophisticated geometry alignment up to 9x5 grids and 17x17 grids from Gwarp3 PC tool through USB or Ethernet. Selectable grid pattern size and various colors and styles are embedded. Corner Wall image adjustment for mapping image at 90 degrees corner and Linearity Grid Line Adjustment are new function in geometry alignment. Separate RGB gamma correction for edge blending region color fine-tune, individual color correction for each output, color uniformity and 9 regions non-edge blending area black level uplift are also standard functions in G804. Users can see real time geometry and color adjustment to get optimized result.


HDMI 2.0 loop out supports daisy chain connection up to 7680\*1200 @30Hz / 4096x2160 @60Hz and allows large display with multiple G804 cascaded. Video wall function in G804 is to crop and allocate source image for each projector and set overlap pixels for edge blending. Complete curved edge blending can be achieved through remote controller and Ethernet without PC software, video distributor and splitter.

G804 is designed to support programmable EDID and non-VESA standard input. User can create any EDID timing in the range between 1024x768 and 3840x2400 in order to optimize video performance.

Using G804, users can replace high end projector with low cost projector without lens shift, warp and edge blending. It provides easy configuration, low entry barrier, cost effective, reliable and flexible solution.

Dual power supply system was designed in G804. User can use either AC 100V-240V power supply or external DC 12V 2A power supply. When apply AC power supply, user will have one DC 12V 1A output for signal extender. Standard delivery will pack with AC power cord only.

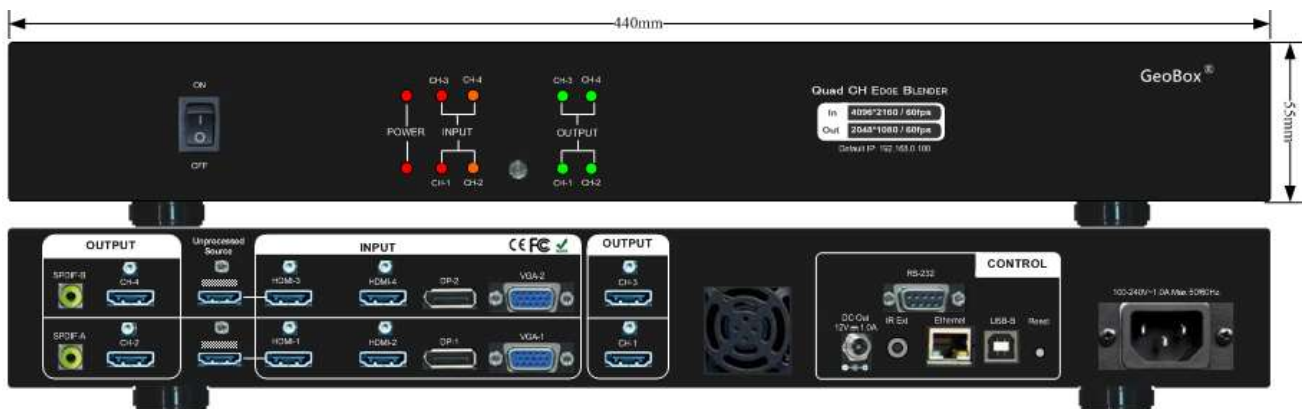

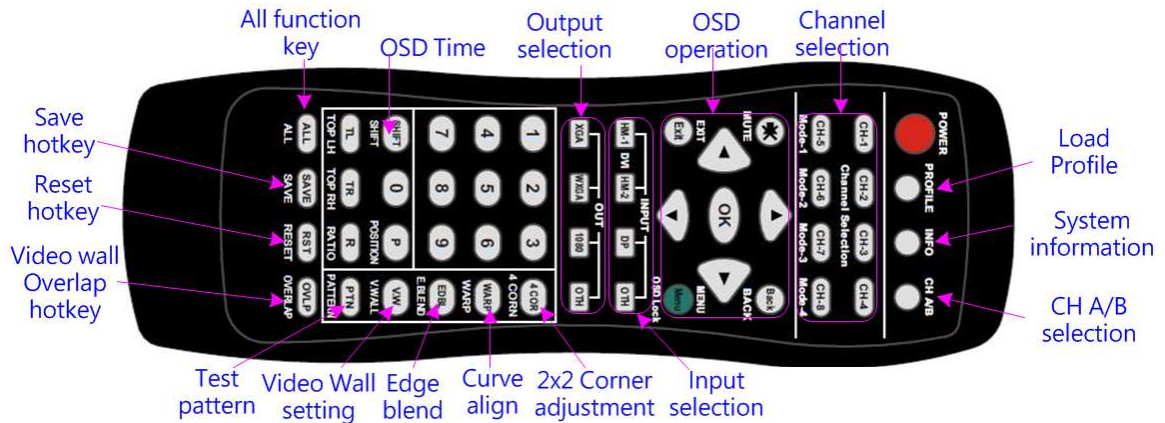

## Specification

- ✧ Input: Two processing modules. Each module consists of 2x HDMI 2.0b, 1x DP1.2a, 1x VGA
- ✧ HDCP: HDMI V2.2/V1.4, DP: HDCP: V1.3
- ✧ Max. input resolution: 7680\*1200 30fps / 4096x2160 60fps
- ✧ Output: 4x HDMI up to 2048x1080/60 & WUXGA with RGB 4:4:4 progressive output
- ✧ 2x HDMI 2.0 loop out ports for multiple unit cascade & daisy chain connection
- ✧ New generation warp engine for geometry warp alignment up to 17x17 grid control points.
- ✧ Maximum geometry adjustment up to 1200 pixels in both horizontal and vertical directions.
- ✧ Edge blending at 4 edges up to H=1920 pixels, V=1200 pixels with independent RGB gamma correction and 9 areas black level uplift.
- ✧ Support Corner Wall adjustment in H&V at flexible location with the same image scaling factor.
- ✧ Support Linearity Grid Line adjustment for quick H&V line position alignment.
- ✧ Embedded full function video wall function for image split, cropping and overlap pixel setting.
- ✧ Support non-VESA standard input timings
- ✧ Selectable output up to 2048\*1080 60Hz.
- ✧ 4:4:4 Chroma sampling, 30 Color bits, 12-bit RGB gamma CLUT
- ✧ Support sRGB & xvYCC color processing & 8/10/12-bit deep color
- ✧ System settings can be stored and backup.
- ✧ Selectable grid pattern size from 8-120 pixels in H&V direction. Default is 32\*32 pixels.
- ✧ Selectable grid pattern color and with optional transparency to see background image.
- ✧ Flexible aspect ratio adjustment in each edge up to +\_ 1800 pixels.
- ✧ 50Hz in/out & frame rate conversion.
- ✧ 10-bit processor, 3:2/2:2 cadence, low angle smooth algorithm, high quality scaling engine
- ✧ 3D motion adaptive de-interlace
- ✧ Frame lock for multiple channel synchronized outputs
- ✧ High Dynamic Range (HDR) support: SMPTE ST-2084, SMPTE ST-2086
- ✧ Individual color and white balance adjustment in each output channel.
- ✧ Individual 90/180/270 rotation, flip, cropping, scaling & color adjustment in each channel
- ✧ 90/270 degrees rotation and flip only available under 4k/30Hz input resolution.
- ✧ Embedded HDMI & SPDIF audio outputs
- ✧ Selectable and programmable EDID
- ✧ ESD Protection: ±8kV (Air-gap discharge), ±4kV (Contact discharge)
- ✧ Dual power supply in G804-AC. User can use either AC 100-240V or DC 12V power supply. When use AC power supply, there is a DC 12V 1A output for signal extender.
- ✧ AC power supply: 100V-240V, DC adapter: 12V 2A
- ✧ Power consumption: max. 11w
- ✧ Working environment: 45° C, 10-90% RH
- ✧ Control: IR, RS232, USB, Ethernet
- ✧ Dimensions: 440mm\*180mm\*55mm, Weight: 2.55kg
- ✧ CE/FCC/RoHS/Green Certified
- ✧ 2 Year Warranty, paid extension available up to 5 years

## **Functions and features**

### **A. Input and output:**

Two processing modules, each consists of below I/O:

1. Input ports: 2x HDMI, 1xVGA, 1x DisplayPort
  - HDMI & DisplayPort support 7680\*1200 @30Hz / 4096\*2160 @60Hz with 4:4:4 sampling without compression. VGA supports up to WUXGA or 205MHz analog input signal.
  - Connect with various video sources and support none VESA standard input resolution.
2. Output ports: 2x HDMI. Selectable output resolutions: 720x480, XGA, WXGA, 1280x1024, 1366x768, 1400x1050, 1600x1200, 1920x1080 (24/30/50/60Hz), 2048x1080/60 & 1920\*1200/60. RGB 4:4:4 progressive output
3. Loop out port: 1x HDMI 2.0 (supports 7680\*1200 @30Hz / 4096\*2160 @60Hz)
4. Signal frame lock for synchronization between multiple output channels.

### **B. Image warp, geometry alignment and edge blending**

1. Selectable grid pattern size for geometry alignment from 8-120 pixels in H&V with variable color and styles. Default size is 32\*32 pixels.
2. With full functions for quick 4 corner alignment, vertical and horizontal keystone correction, Pincushion & Barrel adjustment, image warp and image 90/180/270 degrees rotation and flip.
3. Each unit controls quad projectors and can be cascaded to control unlimited number of projectors.
4. Integrated with full function IR remote controller. Manual geometry alignment up to 9\*5 grid patterns with H=+\_1200 pixels and V=+\_1200 adjustment range in full HD output (4 corner + warp adjustment).
5. Gwarp3 PC tool is available for warp and geometry alignment up to 17x17 grid patterns with H=+\_1200 pixels and V=+\_1200 pixels adjustment range in full HD output through USB or Ethernet. After finishing geometry alignment, the parameters can be stored inside GeoBox and no more PC tool is needed.
6. Corner wall geometry alignment at 90 degrees corner wall up to 900 pixels adjustment range in H&V directions with up to 1200 pixels position adjustment in horizontal direction.
7. 4 directions edge blending up to H=1920, V=1200 overlapped pixels for flat, curved & cylindrical screens.
8. Independent RGB gamma selection for edge blending color fine tune.
9. Precise black level uplift at multiple selected areas (up to 9) to compensate light leakage in the projector.
10. White balance and individual color correction for each projector.
11. Fine pixel color uniformity adjustment across entire image.

### **C. High end 10-bit video processor**

1. Integrated with 10-bit high end processor with 3D motion adaptive de-interlace, low angle smooth algorithm and 3:2/2:2 film mode detect and recovery function.
2. Complete color adjustment function, including brightness, contrast, hue, saturation, preset color temperature, independent RGB color adjustment and white balance correction.

## D. Edge mask

Image [SHIFT] to execute edge mask up to 500 pixels following the image after geometry adjustment and Edge [Mask] with 8 adjustment points to provide irregular edge mask up to 900 pixels in each control point.

## E. Video wall function

1. Image cropping and location assignment for each projector.
2. Overlap pixel adjustments up to 900 pixels for image position shift, bezel compensation and creating overlap region for edge blending and aspect ratio adjustment.
3. Serve as video wall controller for irregular video wall display up to 15x15 matrix display from single signal input source.

## F. Image rotation and flip

Image 90/270 degrees rotation & flip under 4k/30Hz input. Image 0/180 degrees rotation and flip supports up to 4k/60Hz input.


## G. System control and other features

1. 1.5U housing for easy rack installation. Professional design and reliable.
2. Operation temperature: 0-45° C. Relative humidity: 10%-90% non-condensing.
3. Replace high price projector with low cost projector and achieve the same functionality.
4. Full function OSD by IR remote controller.
5. Full function system setup through USB, WebGui or Ethernet (Including through WiFi by Mobile or iPad)
6. Firmware update via USB or Ethernet.
7. Gwarp3 PC tool can control multiple processors simultaneously through USB or Ethernet.
8. Internal grid pattern with selective pixel size, color and style for easy geometry alignment.
9. RS232 & Ethernet system control compatible with most of control system.
10. User can select blue or black background color when no input signal is detected.
11. Programmable EDID in the range at H=1024~3840, V=720~2400.
12. BOX ID and programmable IP address for convenient multiple unit control at the same time.
13. User can save up to 5 settings and can be recalled by remote controller, RS232, USB or network.
14. Automatic power ON/OFF through input signal control. While no input signal is detected, it will shut down output automatically.
15. Dual AC & DC Power supply systems. Provide DC 12V 1A output for signal extender while using AC.
16. Dimension and weight: 440x180x55mm, 2.55kg (Body only)



## Feature illustration

### Selectable Grid Pattern for geometry alignment

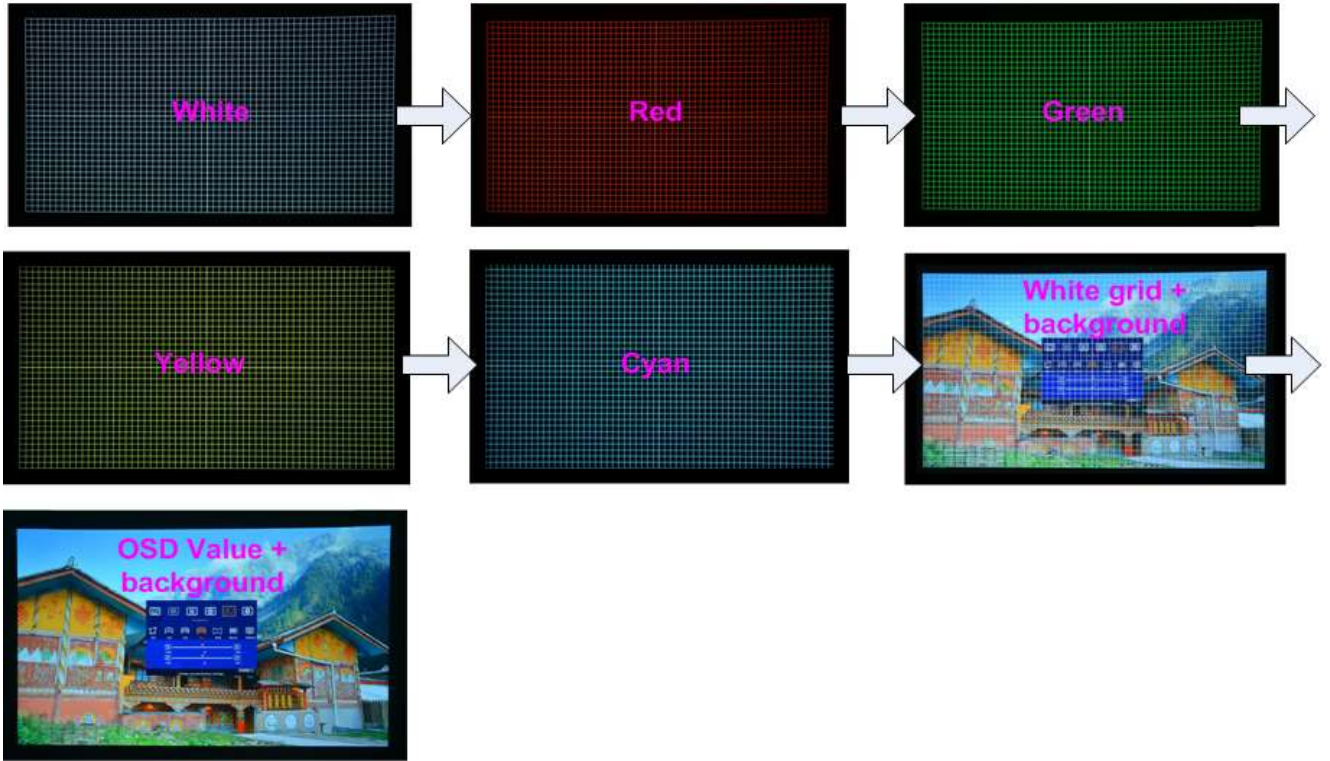

### Selectable grid pattern size for geometry alignment


The pixel size in grid pattern for geometry alignment is selectable to meet high end simulation system geometry alignment requirements. The grid size in both horizontal and vertical directions is from 8 to 120 pixels with 1-pixel increase. H&V grid size will be the same. User can select grid size under [Edge Blend] menu.







0

### 4K/60 daisy chain connection

No additional equipment is required.

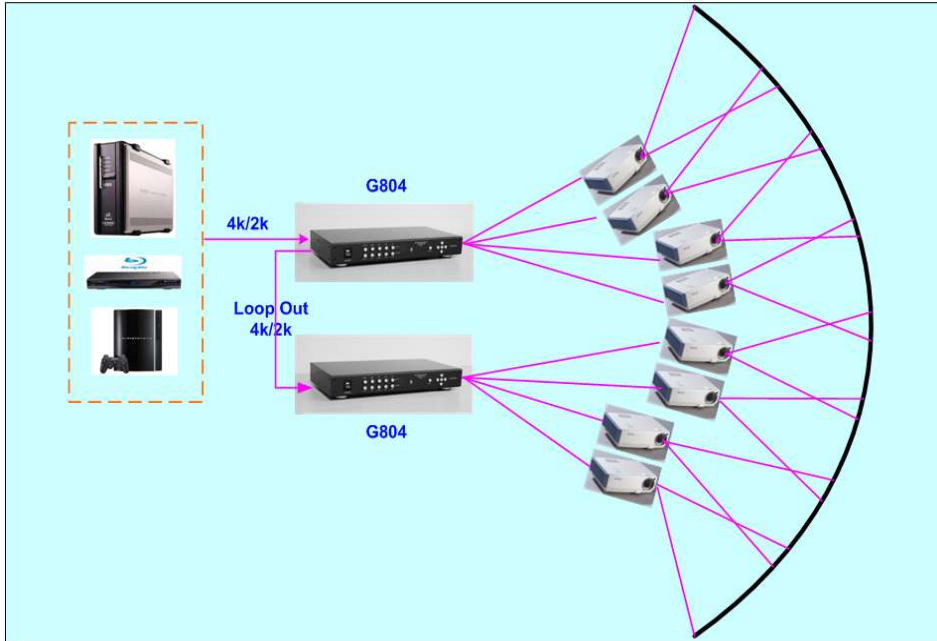

### Image geometry alignment and warp

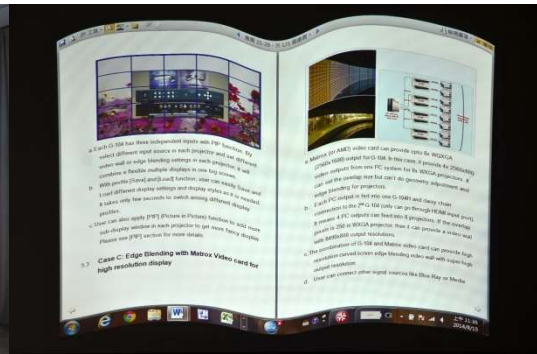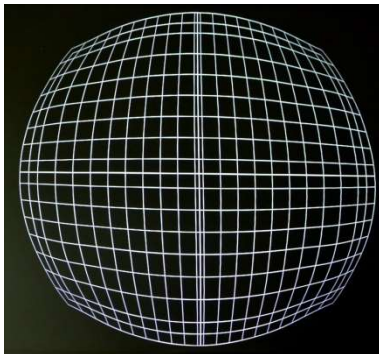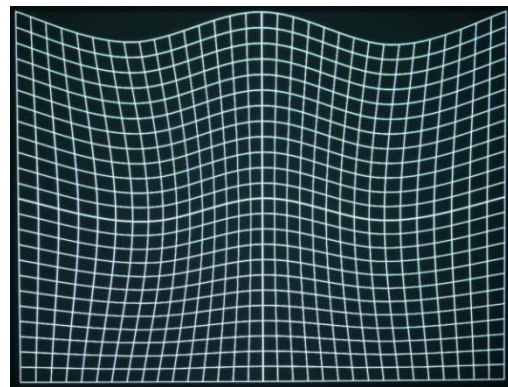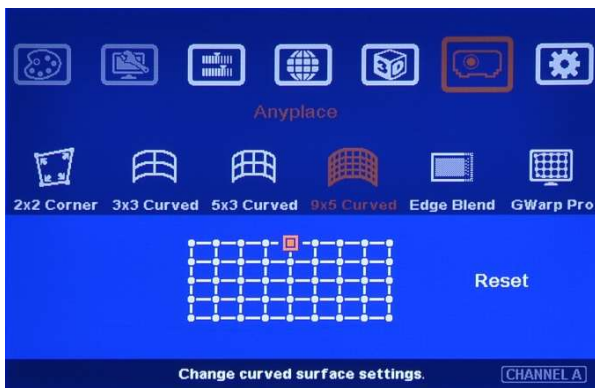



## **Edge blending on flat and curved screen**



## **Corner wall Alignment & Display**

Corner wall alignment function is functional in both horizontal and vertical direction at any location. The image scaling factor in two split sections will keep the same. Corner wall geometry alignment up to 900 pixels adjustment range in both H&V directions with up to 1200 pixels position adjustment in horizontal direction. Example for horizontal adjustment: the control point can be moved down to 900 pixels and the corner point can be +\_1200 pixels away from the center point in horizontal line. Corner position alignment and Edge Blend function are still available with Corner Wall adjustment for easy image mapping and system setup.



In Horizontal and Vertical directions

Can be other location but not only at center




Two projector corner wall application

Three projector corner wall application

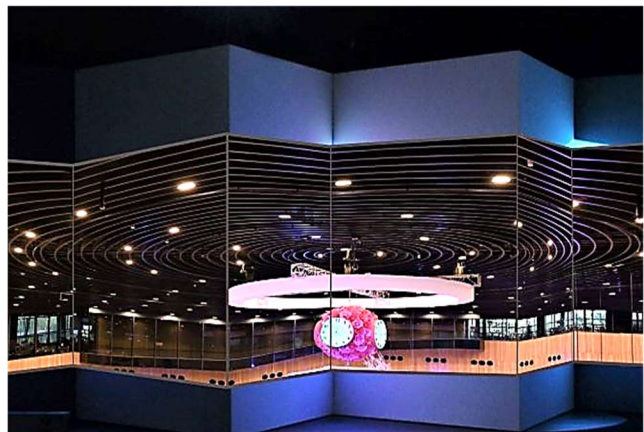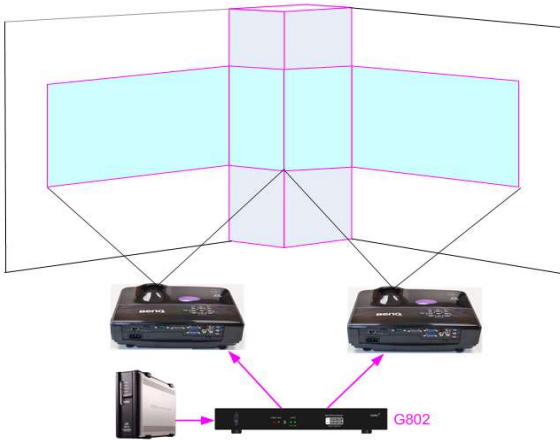

Another corner wall application examples



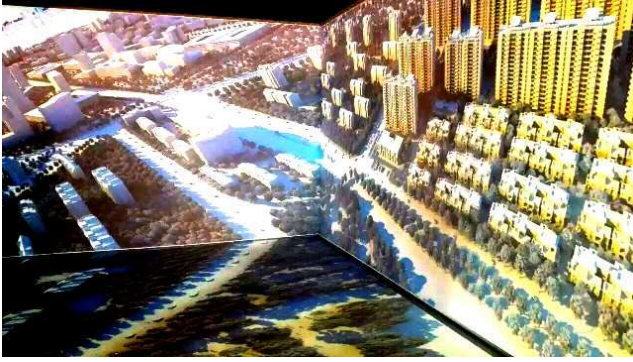


Single projector application with projector at landscape or portrait position

### **Linearity grid line adjustment**

When projector projects image on curved screen, the image will change the grid size gradually and cause different scaling factor on the center and both sides. Linearity grid line adjustment is to compensate this kind of effect and enable complete image with the same scaling factor.

1. This function can be executed through remote controller and Gwarp3 PC tool and applied to both horizontal and vertical directions.
2. The maximum adjusting points are 17 in both horizontal & vertical directions.
3. Linearity line adjustment can be executed together with warp alignment & edge blending at the same time.



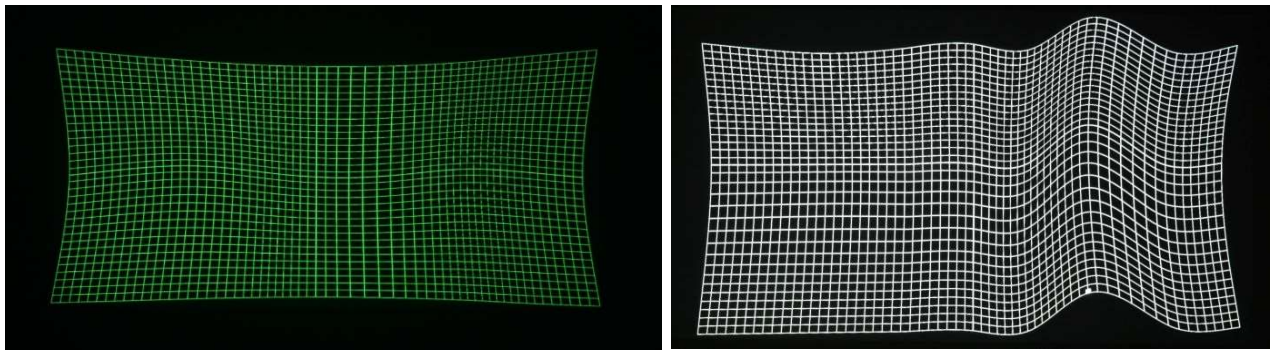


**Immersive display**



Immersive system with 3 walls and one floor

**Big scale display**

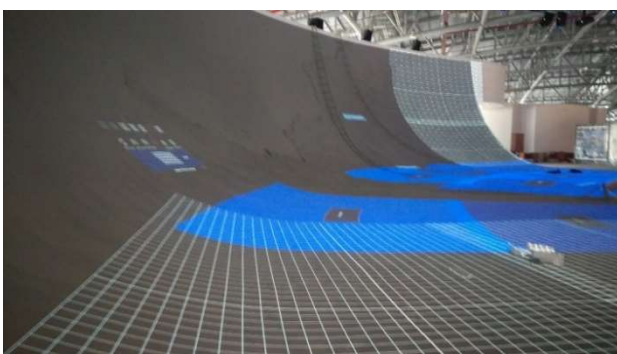

24 units of Christie projectors together with GeoBox for 35mx18m screen

## Flexible display


One G804 has below flexible display functions:

1. One big content edge blending. (All-in-one)
2. Independent content display from each projector. (1+1+1+1)
3. 3+1 or 2+2 display
4. Edge Blending with projector at portrait to increase image height.
5. In each processing module, if user selects two inputs for two discrete displays in two projectors, the input source can't be two HDMI. It should be HDMI+DP, HDMI +VGA or DP+VGA.



## Independent RGB gamma correction

Independent RGB gamma value adjustment in Overlapped region allows more capability to compensate color banding in overlapped region.

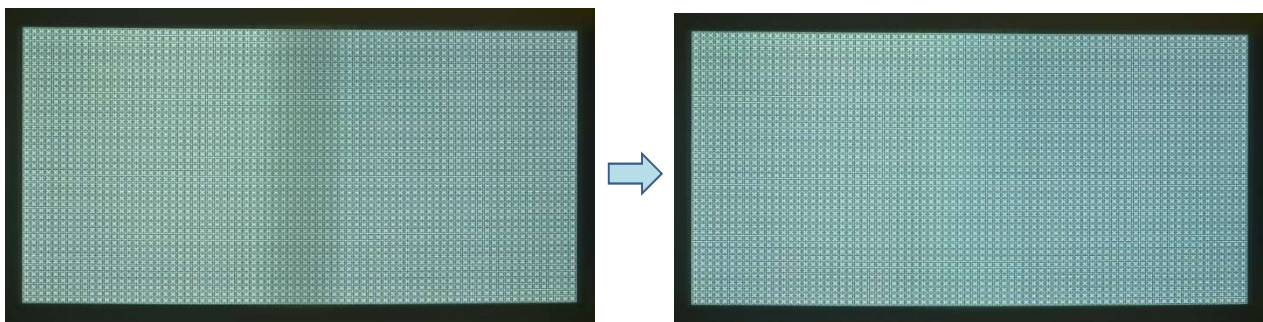




### White balance & Color correction



### Image Flip & Rotation

Image 90/270 degrees rotation and flip under 4k/30Hz resolution. Landscape and top/bottom flip support up to 4k/60Hz. After image rotation or flip, user can also adjust the aspect ratio.

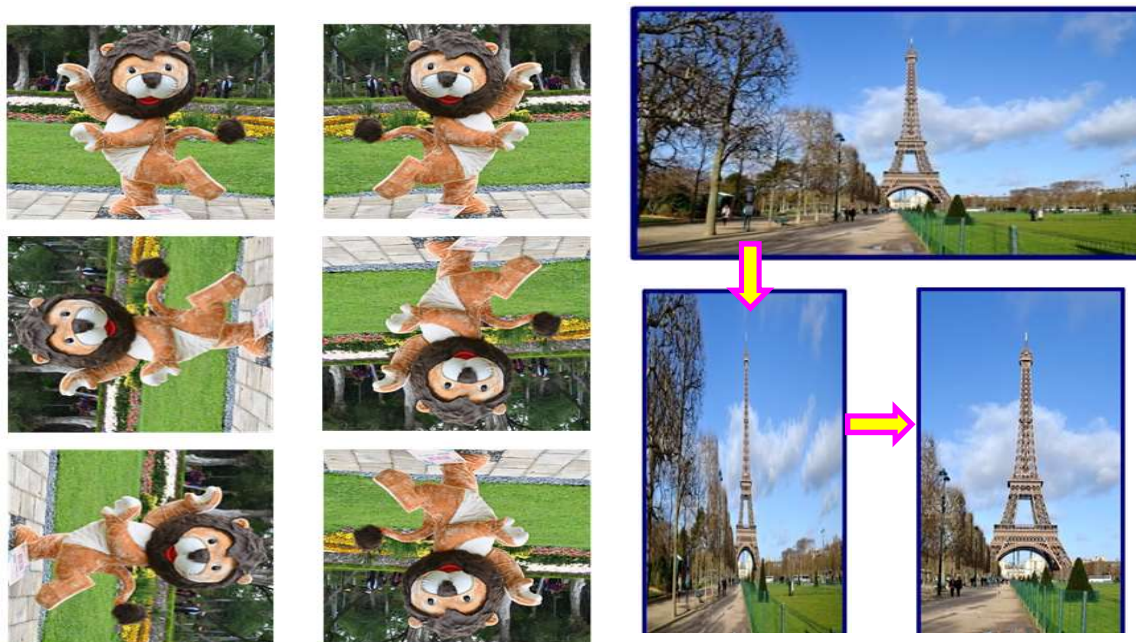



### **Black level uplift**

It can compensate the light leakage in the projectors, especially in low contrast ratio projector under dark working environment. The native contrast ratio is related to projector light leakage and can't be reduced through signal processing. Higher native contrast ratio will have less light leakage. Laser projector will have high contrast ratio and is the best choice for edge blending system. Separate RGB precise black level uplift can be executed in multiple regions (up to 9) in each output channel at selectable position.




**Nine regions black level uplift with flexible border selection**

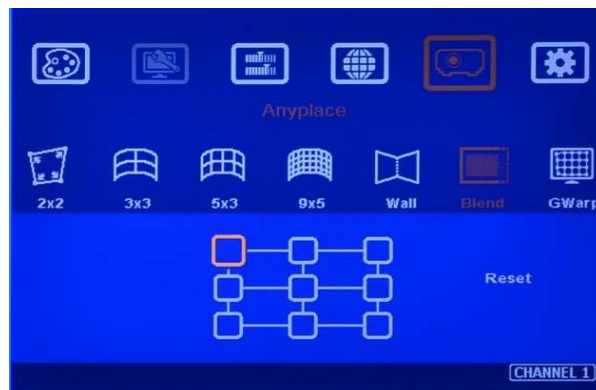

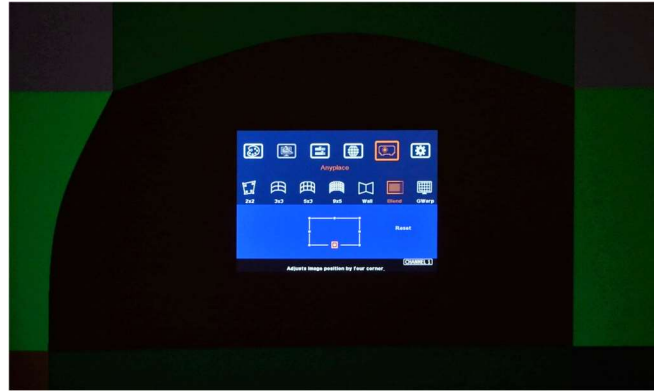

### **Stretch image and change aspect ratio**

Geometry adjustment and Video wall cropping function can compensate image size or change aspect ratio.

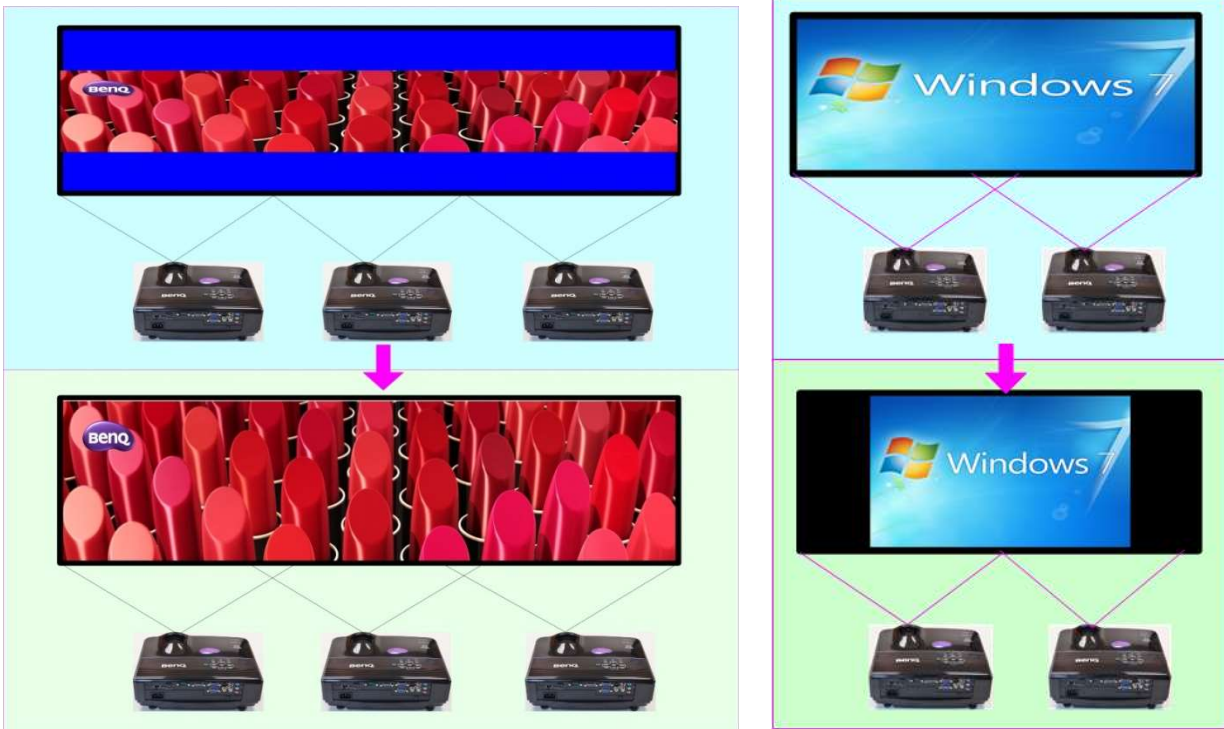

### **Image stacking**

Image stacking can increase the brightness of the image. It can be implemented on flat or curved screen. One G804 can control two stacking system at the same time.



## Edge Mask

There are two edge mask functions in GeoBox. One is image [Shift] and another one is Edge [Mask] under Edge blending menu.

1. [Shift]: Able to do edge mask with black background in each edge up to 500 pixels. The image mask location will follow the image position after geometry alignment.
2. [Edge Mask]: There are 8 control points for edge mask. When user moves the position for each control point it will result many kinds of edge mask pattern. The maximum position adjustment for each control point is +\_ 900 pixels.
3. The adjusting range for [Shift] is based on the image position after geometry alignment and the range for [Mask] is calculated from the original edge position before geometry alignment and [Shift] edge adjustment.
4. User can apply both [Shift] + [Mask] at the same time to create more flexible edge mask effect.





Original Image after geometry alignment

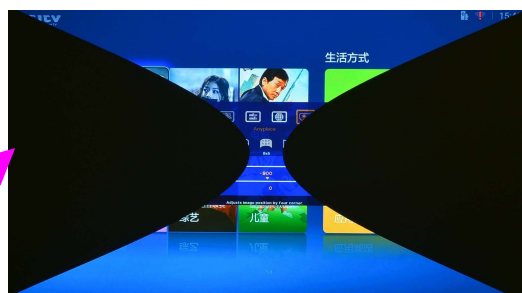


Image [Shift] (Follow geometry curve)



Image [Mask] (executed by 8 control points)

8 point Image [Mask] example



### Scaler switcher and format conversion

Four outputs can have different input port, color, geometry, image cropping, rotation angle and output resolution settings for different display devices. Input port can be HDMI, DP and VGA. The output format is HDMI. Input resolution is up to 7680\*1200 @30Hz / 4096\*2400 @60Hz with selectable outputs up to 2048x1080 @60Hz.



