

# HiDTV User Manual

## 1. HiDTV Introduction.

Welcome to HiDTV. It is a stable multimedia application that allows you to watch ,record TV & radio programs and supports H.265 (HEVC) video decoding.



|   |                                                                                                        |    |                                                                                                                        |
|---|--------------------------------------------------------------------------------------------------------|----|------------------------------------------------------------------------------------------------------------------------|
| 1 | Minimize window                                                                                        | 10 | Signal strength display window                                                                                         |
| 2 | Full screen / window switch                                                                            | 11 | Setting: Record file format setting.<br>Hardware setting Recorded file location setting.<br>Schedule Recording setting |
| 3 | Exit HiDTV software                                                                                    | 12 | EPG: open HiDTV EPG window                                                                                             |
| 4 | Playback (time-shifting)<br>Recorded file playback                                                     | 13 | Available channel list                                                                                                 |
| 5 | Video: record the current playing audio and video to the special image files                           | 14 | Volume adjustment                                                                                                      |
| 6 | Stop: stop the current video program<br>Stop the current replay video files<br>Stop auto scan channels | 15 | Mute:                                                                                                                  |
| 7 | Channel edit: Scan channel automatically<br>rename the current channel, add favorite channel           | 16 | Time-shifting and pause of playback:                                                                                   |
| 8 | Current input source or channel name display                                                           | 17 | Recorded file playback                                                                                                 |
| 9 | Hardware description                                                                                   |    |                                                                                                                        |


2. Channel Scan – Select the set button to start scanning.

Channel scan
×


Please select hardware

Digital TV
▼

Scan Channels

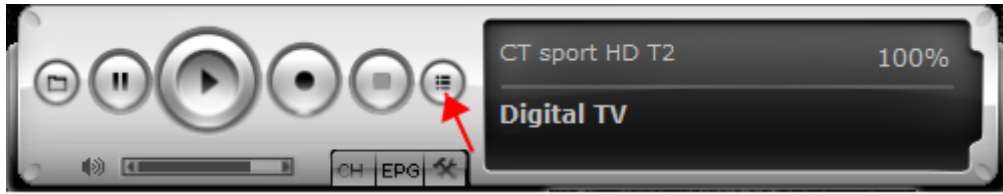

### 3. Select Country

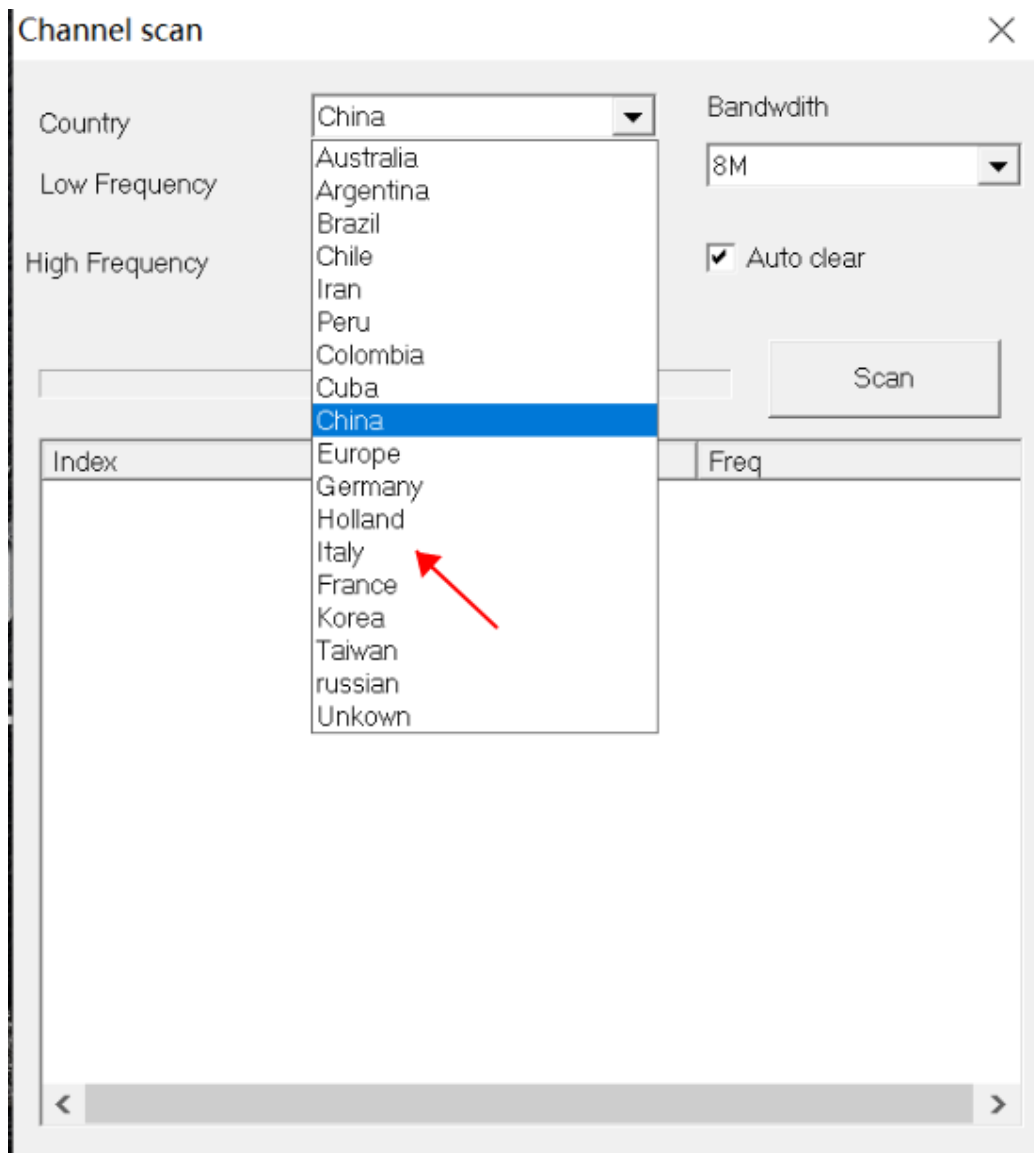

#### 4. Select Bandwidth

**Channel scan** ✕

Country:  Bandwidth:

Low Frequency:

High Frequency:

| Index | Name | Freq |
|-------|------|------|
|-------|------|------|

<  >

5. Enter into the interface of scanning channels.

**Channel scan** ✕

Country:  Bandwidth:

Low Frequency:

High Frequency:   Auto clear

482.000(MHz)



| Index | Name                | Freq    |
|-------|---------------------|---------|
| 1     | CT 1 HD T2          | 474.000 |
| 2     | CT 2 HD T2          | 474.000 |
| 3     | CT 24 HD T2         | 474.000 |
| 4     | CT sport HD T2      | 474.000 |
| 5     | CT :D/art HD T2     | 474.000 |
| 6     | CRo RADIOZURNAL T2  | 474.000 |
| 7     | CRo DVOJKA T2       | 474.000 |
| 8     | CRo VLTAVA T2       | 474.000 |
| 9     | CRo RADIO WAVE T2   | 474.000 |
| 10    | CRo D-DUR T2        | 474.000 |
| 11    | CRo RADIO JUNIOR T2 | 474.000 |
| 12    | CRo PLUS T2         | 474.000 |
| 13    | CRo JAZZ T2         | 474.000 |

<  >


6. After finding the program, select the corresponding program to start playing



## 7. Window Preview

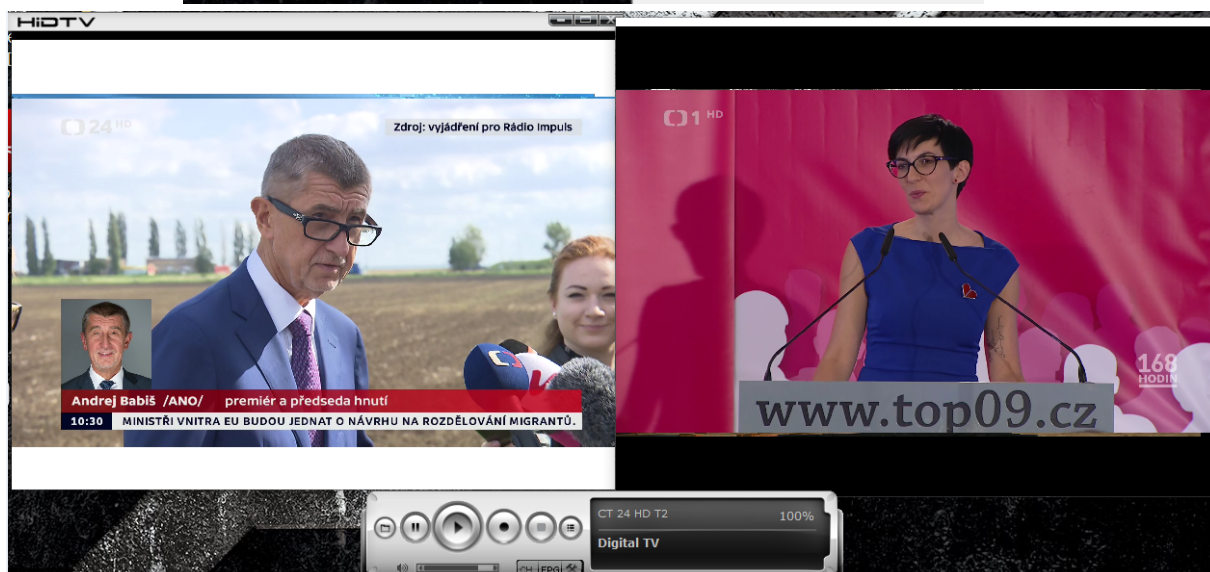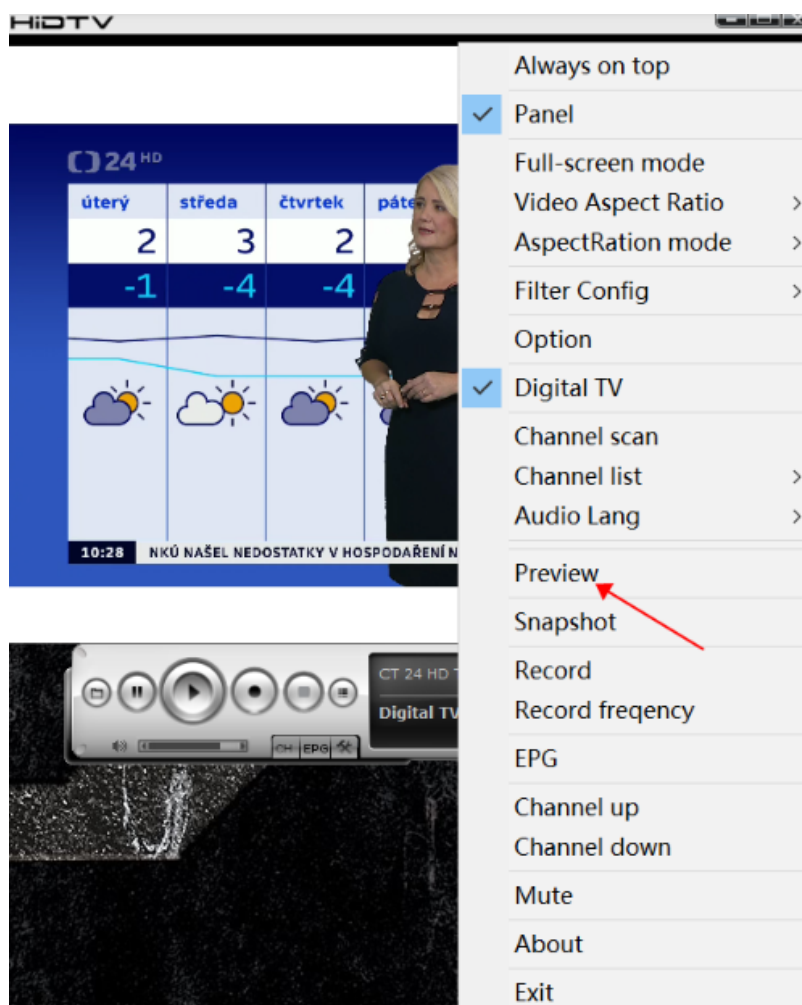


8. Customer can adjust 4:3 and 16:9 modes

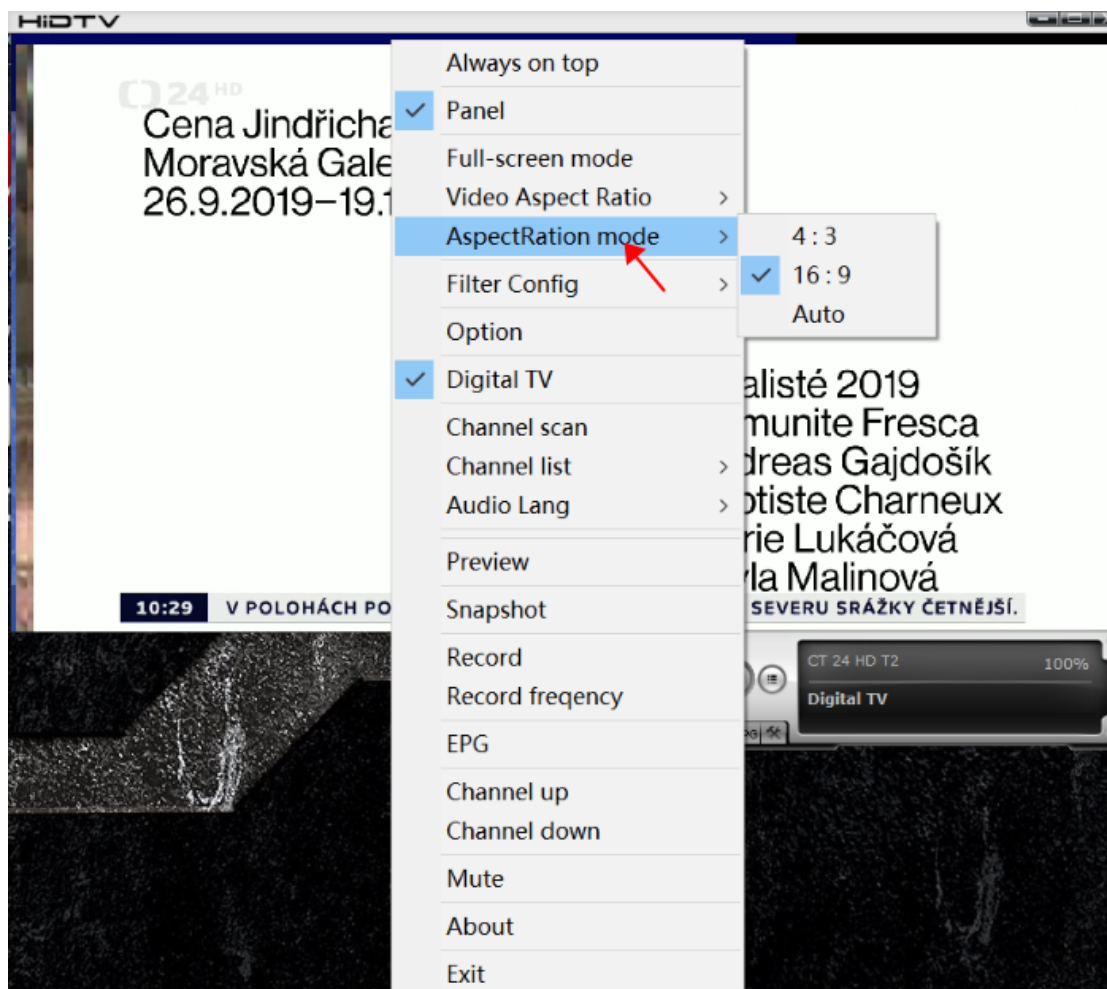



9. Customer can choose audio track

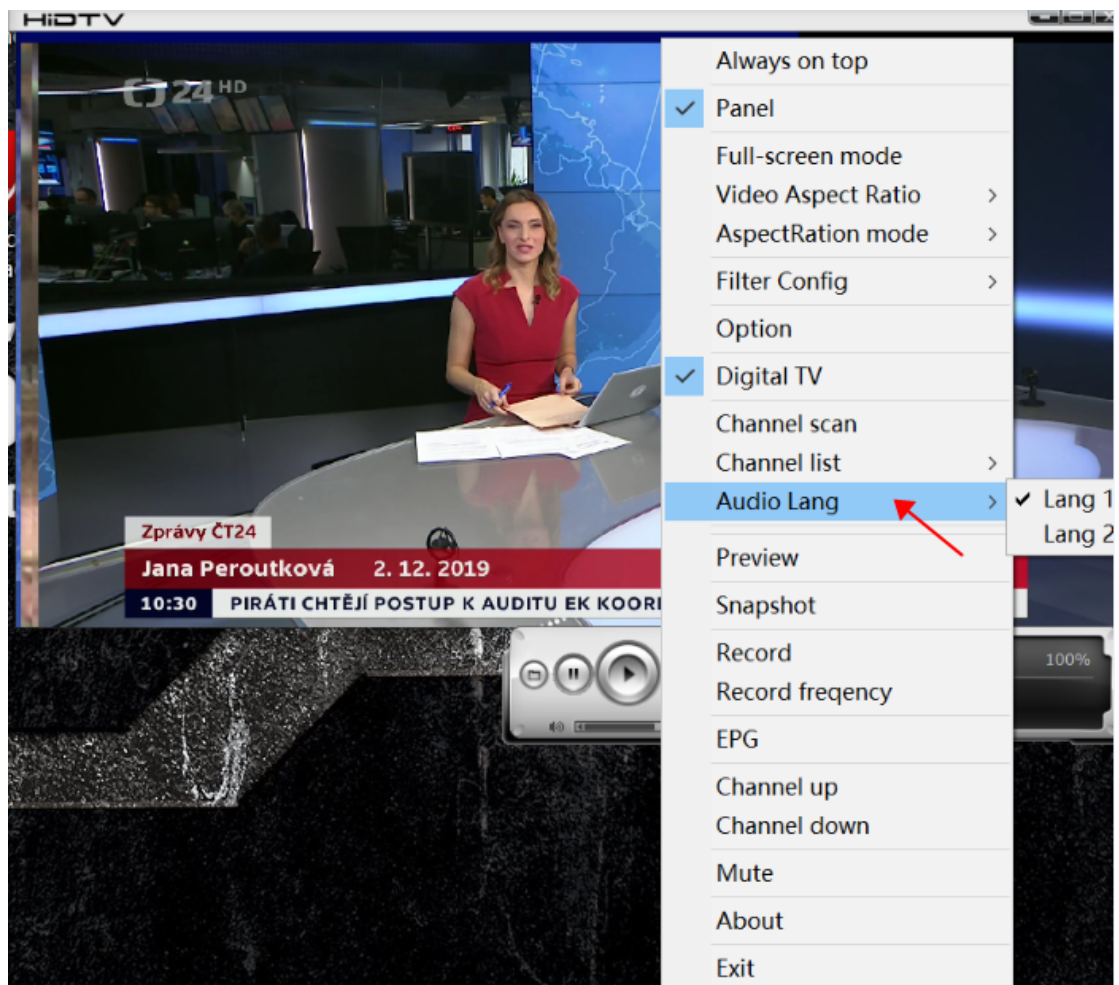


## 10. Introduction of EPG interface

The screenshot shows the EPG interface for channel CT 1 HD T2. At the top, there is a 'Channel list' dropdown menu set to 'CT 1 HD T2' and an 'Update' button. Below this is a navigation bar with tabs for days of the week: Monday (12-02), Tuesday (12-03), Wednesday (12-04), Thursday (12-05), Friday (12-06), Saturday (12-07), and Sunday (12-08). The main content area is a table with columns for 'Name', 'Start Time', and 'Duration'. The table lists various programs such as 'Otec Brown VII, Umíráček, Father Brown Videtektiv...', '&Stan, Katerina Macháčková - 70 let klasické drama...', '168 hodin magazín, reportáže, dokument', 'Dobrodružství kriminalistiky, Neznámé klasické dram...', 'AZ-kvíz / soutě', 'StarDance X ... kolem dokola zábavní / soutěžní pora', 'Zprávy ve 12 zpráv, počasí', 'Předpověď počasí, sportovní zprávy, počasí', 'Sama doma zábavní / soutěžní pora', 'Po stopách hvezpозoruhodné osobnosti', 'Velký případ malého detektiva a policejního psa Kyk...', and 'To je vražda, napsala VIII. Až naveky Murder She...'. Below the table is a 'Description' field and a status bar that says 'Getting EPG information ...'.

### 10.1 Customer can choose a favorite program pre-recorded

This screenshot is similar to the previous one, but it shows a context menu that has appeared over the first program in the list: 'Otec Brown VII, Umíráček, Father Brown Videtektiv...'. The menu has two options: 'Record' and 'Watch'. The 'Record' option is currently selected, and a red arrow points to the 'Watch' option. The rest of the interface, including the channel list, navigation tabs, and program table, remains the same as in the previous screenshot.


10.2 Customer can set the recording duration of the pre-recorded program parameters.

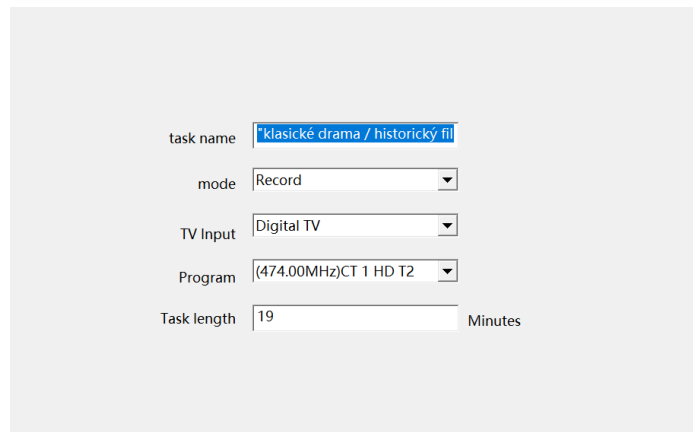

A screenshot of a configuration window for a recording task. It contains several input fields and dropdown menus:

- task name: "klasičké drama / historický fil" (highlighted in blue)
- mode: "Record" (dropdown)
- TV Input: "Digital TV" (dropdown)
- Program: "(474.00MHz)CT 1 HD T2" (dropdown)
- Task length: "19" (text input) followed by "Minutes" (label)


10.3 Set to record once or weekly or monthly

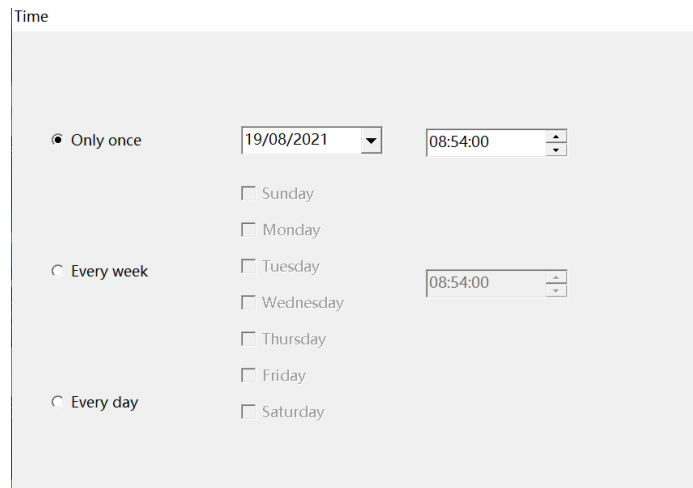

A screenshot of a configuration window titled "Time". It shows recording frequency options and a time selection field:

- Frequency options:  Only once,  Every week,  Every day
- Time selection: A date dropdown set to "19/08/2021" and a time spinner set to "08:54:00".
- Day selection: A list of days with checkboxes: Sunday, Monday, Tuesday, Wednesday, Thursday, Friday, Saturday. The "Tuesday" checkbox is checked.


10.4 Set to automatically shut down / exit APP / keep as it is after recording

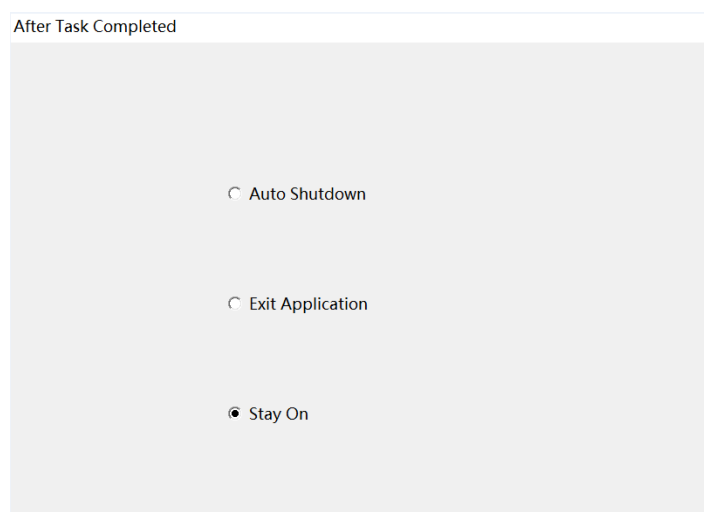


A screenshot of a configuration window titled "After Task Completed". It shows three radio button options:

- Auto Shutdown
- Exit Application
- Stay On

11. In the settings menu, you can set the recording file retention path, screenshot file storage path and Timeshift file retention path.

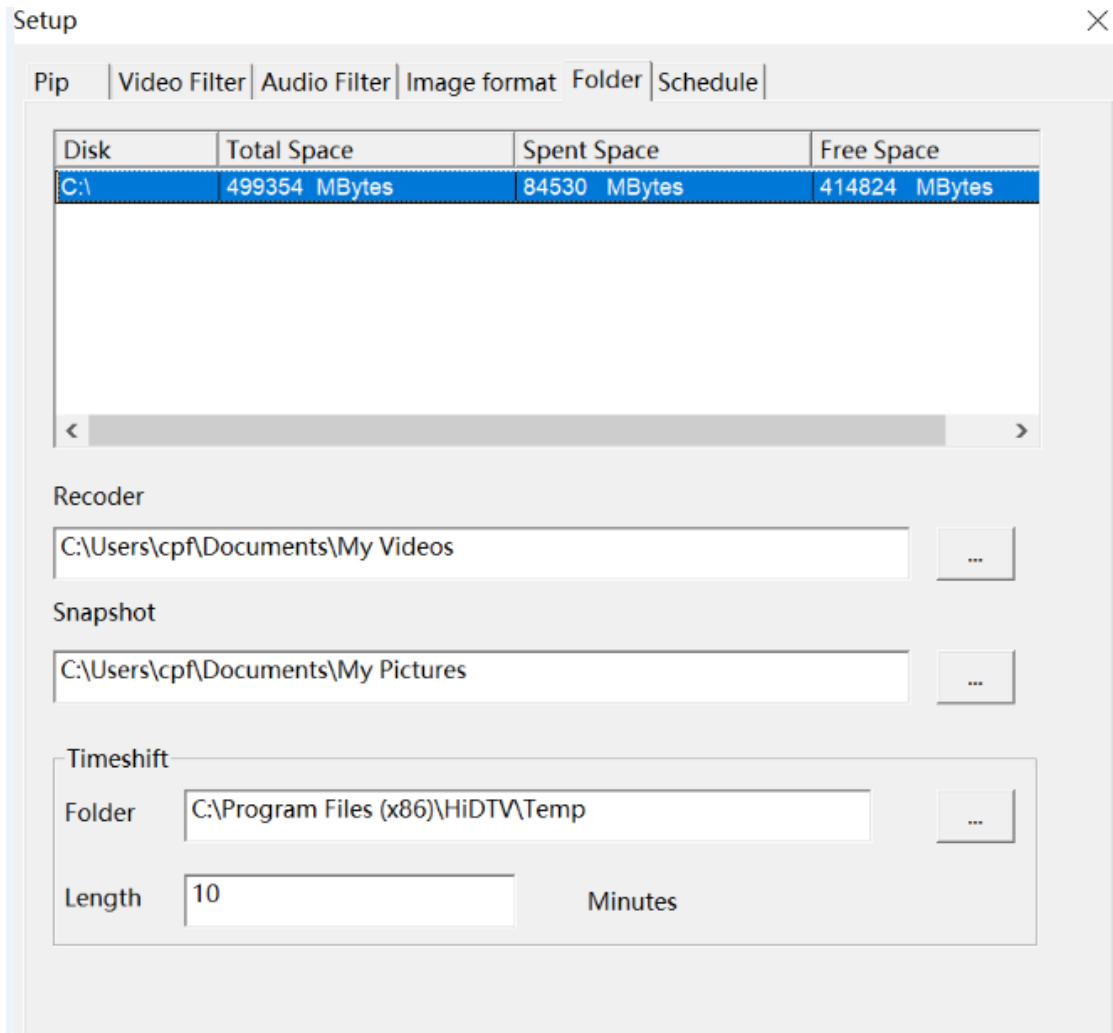

## 12. Pre-recorded file management interface

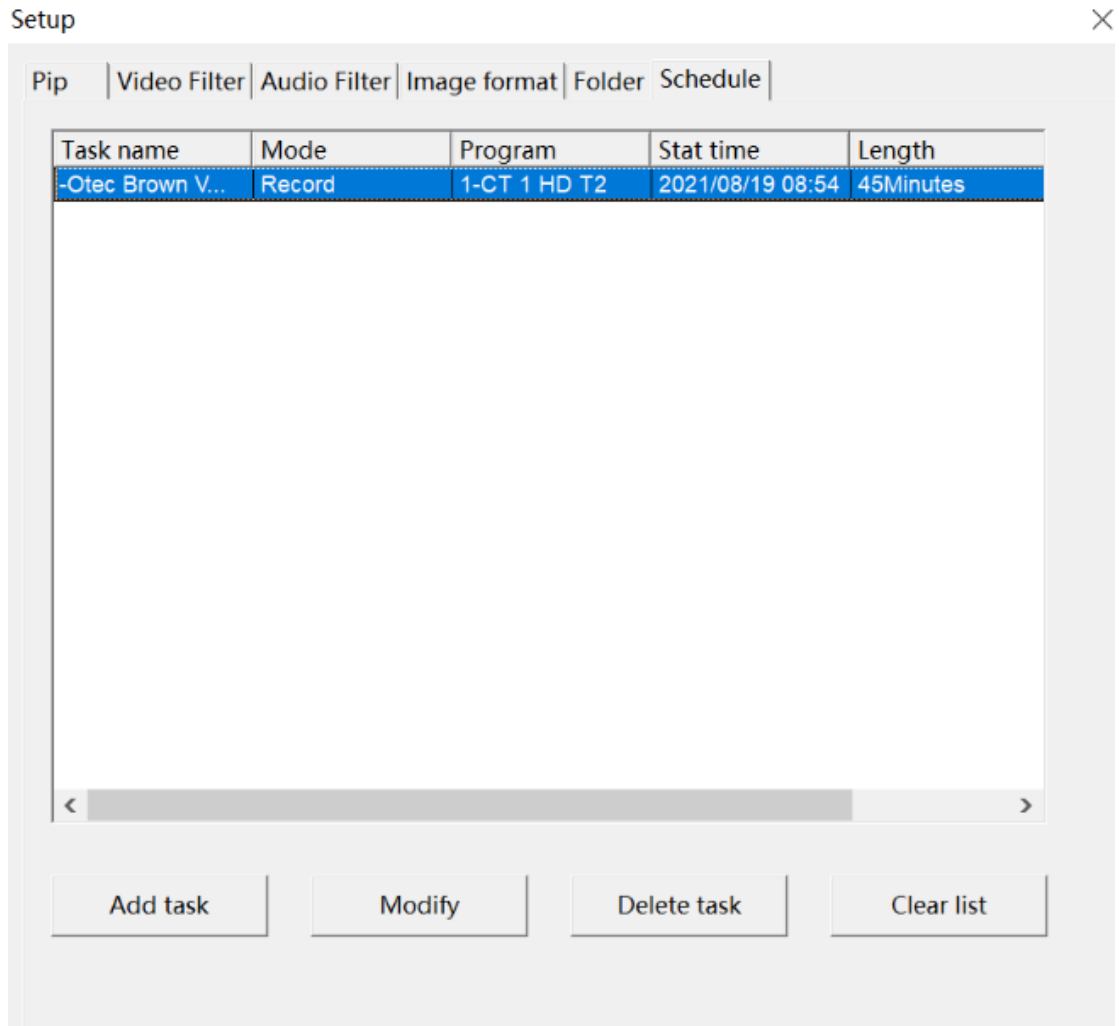

## 13. HiDTV FAQ

### 13.1: Unable to receive TV programs

First of all, please confirm whether the correct driver is installed, you can check whether the correct driver is installed in the Windows device manager-sound, video and game controller.

### 13.2: TV picture mosaic

First of all, please check whether the antenna is connected well, if it is HEVC program, please check the minimum configuration requirements of the computer (see instruction manual).