


IR D2 User Manual

Front side View :

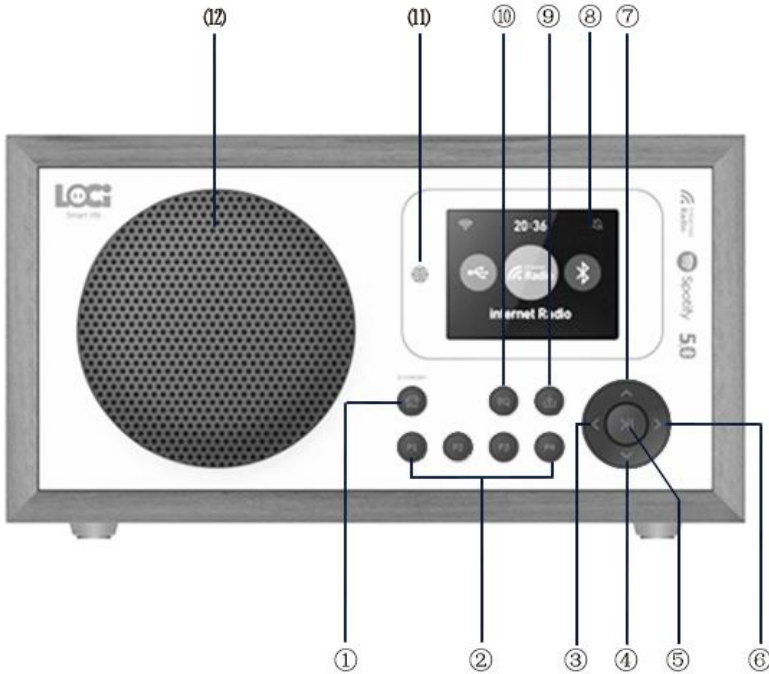

(1) - **STANDBY button** : Press and hold 3 seconds to enter / exit standby mode.

Short press to go Main Menu.

(2) - **Shortcut key P1/P2/P3/P4**: Press P1/P2/P3/P4 key to go internet radio preset list P1/P2/P3/P4 directly.

(3) - **Go Left / Go back / Previous**

(4) - **“Go down” / “Volume -” button**

(5) - **ENTER / “Play/Pause”**

(6) - **Go Right / Next / “zoom in and out”**

(7) - **“Go up” / “Volume +” button**

(8) - **TFT Color display**

(9) - **PRESET button**

(10) - **EQ button**

(11) - **Remote sensor**

(12) - **Driver unit Mode button**

Power Supply:

Use supplied AC adaptor (9V/1.3A) to connect the device IR D2 with electrical socket to supply power.

WIFI Connection


A-- First time to connect Wifi

- 1, When the device is powered on, select language and press ⑤ **ENTER** button to confirm.
--When it comes to "Enable 'Check Network when Power on' ", press ◀▶ and select "YES". Then press ⑤ **ENTER** button ,
--It will shows "Would you like to configure Network now ?" on display. Select "Yes" and press ⑤ **ENTER** button to scan for available networks. Press ▲ ▼ button to select available WIFI name and press **ENTER** button to enter the password input interface.
- 2, How to input the password :
Press ▲ ▼ button to look up the letters/special characters/numbers, press ▶ button to confirm and go to next word input. when input the last password, please press **ENTER** button to confirm.
- 3, Once Wifi connection is successful , it will go to Main Menu.

B -- Change Wifi Connection / Or re-connect Wifi

- 1, Press STANDBY button to enter "Main menu", press ◀▶ button to select "configuration" and press **ENTER** button to enter submenu.
- 2, → Select "Network" and press **ENTER** button to enter "Network" submenu,
→ Select "Wireless Network configuration" ,press **ENTER** button
→ Press ▲ ▼ button to select "Enable", press **ENTER** button to start available networks scanning.
- 3, Press ▲ ▼ button to select your available WIFI name and input the passwords.

Internet Radio

- 1, When Wifi connection is successful, press ◀▶ button to select "Internet Radio" mode, and press **ENTER** button to enter internet radio submenu → "Radio Station/Music" submenu, press ▲ ▼ button to select and enjoy the available radio on the internet.
- 2, Short press ▶ button to zoom out the pictures. Short press ◀ button to return.
- 3, Long press ⑨ "PRESET" button to preset current radio station to your favorite list: press ▲ ▼ button to go the station list number you want and press **ENTER** button to confirm. (If the current radio station is already stored in the Favorite list, long press PRESET button , the icon  on the display reminding you the station is already in the Favorite list)
- 4, Short press "PRESET" button to go to your favorite internet radio station list. Or Press P1/P2/P3/P4 key to go internet radio preset list P1/P2/P3/P4 directly

Bluetooth music play

- 1, Press standby button to go "Main menu", press ◀▶ button to select Bluetooth , and press **ENTER** button to enter Bluetooth mode.
- 2, Use your Bluetooth enabled device (such as iPhone /iPad...), turn on the Bluetooth function, and search for "IR D2" and click it to connect.
- 3, Once connect successfully, it will show "Bluetooth Connected" on display.
- 4, Short Press ⑤ Play/Pause button to play or pause the music. Press and hold ◀▶ button to go previous or next songs. Press and hold button to adjust the volume.

- 5, Long press ⑤ **ENTER** button 2~3 seconds to disconnect Bluetooth, Long press ⑤ **ENTER** button 2~3 seconds again to reconnect Bluetooth. And press ⑤ **Play/Pause** button to play the songs.
- 6, The device will search associated picture on internet for the song which is playing. Short press ► button to zoom out the picture.

USB music play

- 1, Insert USB flash drive, it will show USB connect symbol on top right side of display.
- 2, Press **STANDBY** button to go “Main menu”, press ◀▶ button to select **USB** , and press **ENTER** button to enter USB mode.
- 3, Press ▲ ▼ button to select the songs from USB and press **ENTER** button to play.
- 4, Press and hold ◀▶ button to go previous or next songs. Press and hold ▲ ▼ button to adjust the volume.

Date&Time Setting

A - Under WIFI connection, the device will automatically synchronize the local time.

B - Manual clock setting :

- 1, Press **STANDBY** button to enter Main menu ,then press ◀▶ button to select “configuration” and press **ENTER** button.
- 2, Press ▲ ▼ button to select “Date&Time”, then press **ENTER** button and press ▲ ▼ button to select “Set Date and Time” . Press **ENTER** button→ select “Manual Setup” and press **ENTER** button.
- 3, Press ▲ ▼ button to adjust the numbers , Press ► button to confirm and go to month/year/minutes/hours setting. Then Press **ENTER** button to confirm Date&Time setting.
- 4, Press **MENU** button to return Main menu.

Alarm clock Setting

This device can set 2 sets of alarms, operation as below:

- 1, Press **STANDBY** button to enter Main menu ,then press ◀▶ button to select “configuration” and press **ENTER** button.
- 2, Press ▲ ▼ button to select “Alarm” , then press **ENTER** button to enter Alarm setting.
- 3, Press ▲ ▼ button to select Alarm 1 / Alarm 2 / NAP Alarm / Alarm Volume.
For Alarm 1 / Alarm 2, you can set different Repeat days and different Alarm sound.
Enter Repeat submenu : Everyday/Once/Mon/Tue/Wed/Thu/Fri/Sat/Sun
Enter Sound submenu : Beep/Melody/Internet Radio/FM/DAB/DAB+/USB
Enter Time submenu : Turn **SKIP** knob to set how long does the alarm clock go off.
- 4, Press **ENTER** button to confirm Alarm setting , and press **MENU** button to return Main menu.
- 5, When the alarm clock rings, press any other button (except Standby button) to activate snooze function. After 5 min, the alarm clock will go off again.
- 6, Press Standby button to shut down the Alarm clock.

Sleep Timer Setting

- 1, Press STANDBY button to enter Main menu ,then press ◀▶ button to select “configuration” and press ENTER button.
- 2, Press ▲ ▼ button to select “Sleep Timer” and press ENTER button to enter Sleep timer setting.
- 3, Press ▲ ▼ button to select 15Minutes/30Minutes/60Minutes/90Minutes/120Minutes/150Minutes/180Minutes and press ENTER button to confirm. The device will be automatically enter into standby mode after15Minutes/30Minutes /60Minutes/90Minutes/120Minutes/150Minutes/180Minutes
- 4, Press STANDBY button to return Main menu.

Technical Specifications :	
Output power :	RMS 5W
S/N ratio :	≥70dBA
Distortion :	≤1%
Frequency Response :	120Hz~18KHz
Driver unit :	Φ3inch / 4Ω
Power supply :	AC adaptor 12V/1.3A
Compatible with :	UPnP multimedia server
Working Temperature :	0°C~50°C

Packing List:

- 1x Internet Radio Speaker IR D2
- 1x AC adaptor
- 1x Remote control
- 1x User Manual