



IR D3 User Manual


Front side View :

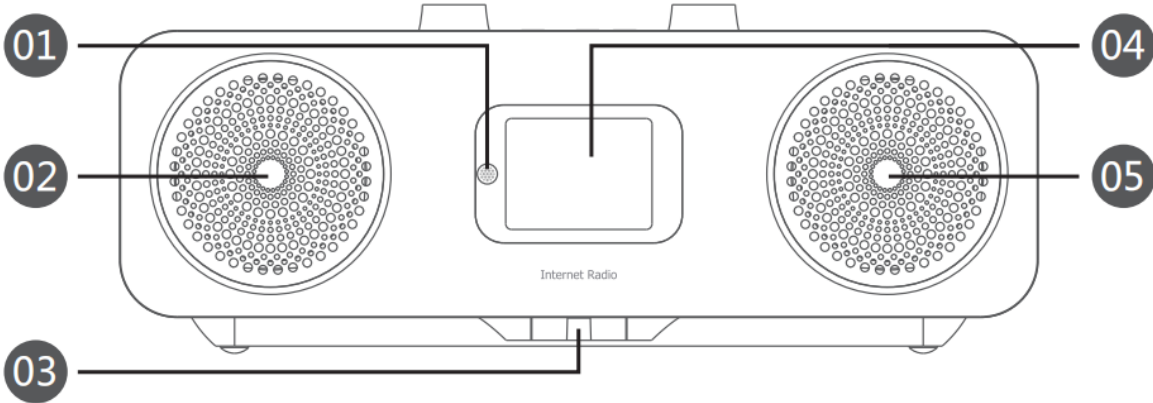

Back side View :

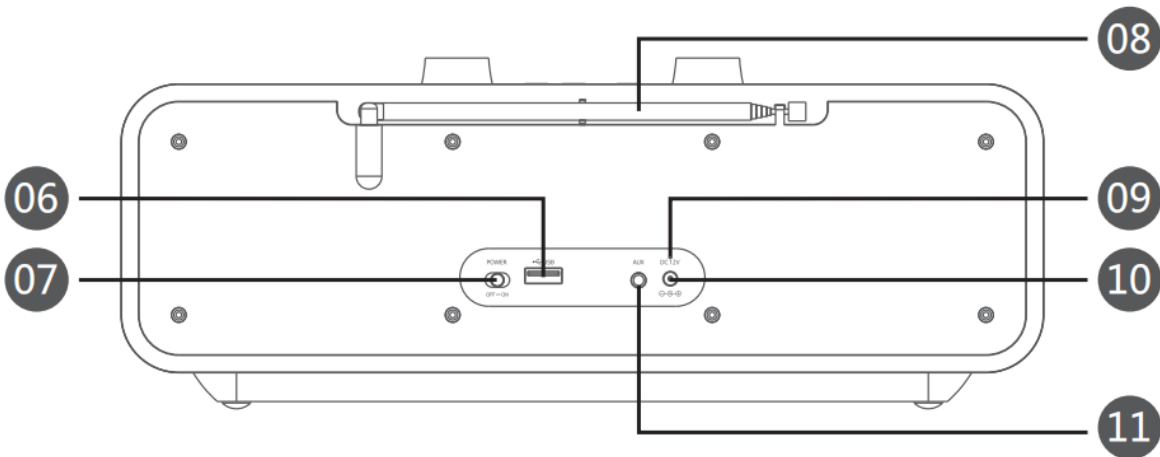

Top View :

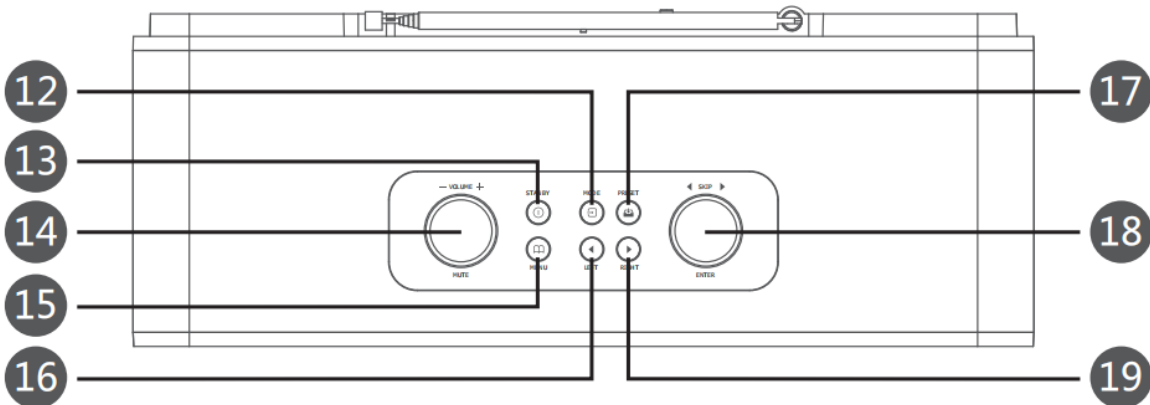

Turn the **SKIP** knob to look up the letters/special characters/numbers, press ► button to confirm and go to next word input. when input the last password, please press **ENTER** button to confirm.

3, Once Wifi connection is successful , it will enter into Main Menu.

B -- Change Wifi Connection / Or re-connect Wifi

1, Press **MENU** button to enter “Main menu”, turn **SKIP** knob to select “configuration” and press **ENTER** button to enter submenu.

2, Turn **SKIP** knob to select “Network” and press **ENTER** button to enter “Network” submenu, enter “Wireless Network configuration” → “Enable”, press **ENTER** button to start available networks scanning.

3, Select your available WIFI name and input the passwords.

Internet Radio

1, When Wifi connection is successful, press **MODE** button to switch to “Internet Radio” mode, and press **ENTER** button to enter internet radio submenu → “Radio Station/Music” submenu, turn SKIP knob to select and enjoy the available radio on the internet.

2, Short press ► button to zoom out the pictures. Short press ◀ button to return.

3, Long press “PRESET” button to preset current radio station to your favorite list, turn SKIP knob to set the station list number you want and press **ENTER** button to confirm。

4, Short press “PRESET” button to go to your favorite internet radio station list.

FM Radio

1, Press **MODE** button to switch to FM mode, and press **ENTER** button to play FM radios.

2, Long press ◀▶ button 2~3 seconds to go previous/next available channels.

3, Short press ◀▶ (or Turn **SKIP** knob) to adjust radio frequency 0.05MHz each time.

4, Long press “PRESET” button to preset current radio channel to your favorite list, turn **SKIP** button to set the radio channel list number you want and press **ENTER** button to confirm。

5, Short press “PRESET” button to go to your favorite FM radio channel list.

DAB/DAB+ Radio

1, Press **MODE** button to switch to DAB mode, and press **ENTER** button to start automatic searching.

2, The available DAB/DAB+ radio stations will be stored after automatic searching. Press “PRESET” button to go to the stored DAB radio stations list ; Turn SKIP knob to select radio stations , press **ENTER** button to play.

3, Long press “PRESET” button to preset current DAB/DAB+ radio station to your favorite list, turn **SKIP** knob to set the DAB/DAB+ radio channel list number you want and press **ENTER** button to confirm。

4, Short press ► button to zoom out the pictures. Short press ◀ button to return.

Bluetooth music play

1, Press **MODE** button to switch to Bluetooth mode, and press **ENTER** button to enter.

2, Use your Bluetooth enabled device (such as iPhone /iPad...), turn on the Bluetooth function, and search for “IR D3” and click it to connect.

- 3, Once connect successfully, it will show "Bluetooth Connected" on display.
- 4, Short Press **ENTER** button to play or pause the music. Turn the SKIP knob to go previous or next songs.
- 5, Long press **ENTER** button to disconnect Bluetooth, Long press **ENTER** button again to reconnect Bluetooth.
- 6, The device will search associated picture on internet for the song which is playing. Short press ► button to zoom out the picture.

USB music play

- 1, Insert USB flash drive, it will show USB connect symbol on top right side of display.
- 2, Press **MODE** button to switch to USB mode, and press **ENTER** button to play songs from the USB flash drive .
- 3, Turn SKIP knob to select the songs from USB and press **ENTER** button to play.
- 4, Press ► button to select if delete the song. Press ◀ button, back to superior menu.
- 5, Short Press **ENTER** button to play or pause the music.

AUX music play

- 1, Connect the device and your smart phone or MP3 player via 3.5mm Aux cable.
- 2, Press **MODE** button to switch to **AUX** mode, and press **ENTER** button to enter AUX mode.
- 3, Play music from your smart phone or M3 player via the device IRD3.

Date&Time Setting

A- Under WIFI connection, the device will automatically synchronize the local time.

B- Manual clock setting :

- 1, Press MENU button to enter Main menu ,then turn **SKIP** knob (or press ◀▶) to select "configuration" and press ENTER button.
- 2, Turn SKIP knob to select "Date&Time" , then press ENTER button and turn **SKIP** knob to select "Set Date and Time". Press ENTER button→ select "Manual Setup"and press ENTER button→Enter into "Set Date and Time" interface.
- 3, Turn SKIP knob to adjust the numbers , Press ► button to confirm and go to month/year/minutes/hours setting. Then Press ENTER button to confirm Date&Time setting.
- 4, Press MENU button to return Main menu.

Alarm clock Setting

This device can set 2 sets of alarms, operation as below:

- 1, Press MENU button to enter Main menu , then turn **SKIP** knob (or press ◀▶) to select "configuration" and press ENTER button.
- 2, Turn SKIP knob to select "Alarm" , then press ENTER button to enter Alarm setting.
- 3, Turn SKIP knob to select Alarm 1 / Alarm 2 / NAP Alarm / Alarm Volume.
For Alarm 1 / Alarm 2, you can set different Repeat days and different Alarm sound.
Enter Repeat submenu : Everyday/Once/Mon/Tue/Wed/Thu/Fri/Sat/Sun
Enter Sound submenu : Beep/Melody/Internet Radio/FM/DAB/DAB+/USB
Enter Time submenu : Turn **SKIP** knob to set how long does the alarm clock go off.

Enter Alarm volume submenu : Press ◀▶ button to adjust the alarm volume.

- 4, Press ENTER button to confirm Alarm setting , and press MENU button to return Main menu.
- 5, When the alarm clock rings, press any other button (except Standby button) to activate snooze function. After 5 min, the alarm clock will go off again.
- 6, Press Standby button to shut down the Alarm clock.

Sleep Timer Setting

- 1, Press MENU button to enter Main menu ,then turn **SKIP** knob (or press ◀▶) to select “configuration” and press ENTER button.
- 2, Turn SKIP knob to select “Sleep Timer” and press ENTER button to enter Sleep timer setting.
- 3, Turn SKIP knob to select 15Minutes/30Minutes/60Minutes/90Minutes/120Minutes/150Minutes/180Minutes and press ENTER button to confirm. The device will be automatically turn off after 15Minutes/30Minutes/60Minutes /90Minutes/120Minutes/150Minutes/180Minutes
(If select “Turn Off” and press ENTER button, the device will be turned off , and enter into standby)
- 4, Press ENTER button to confirm, then press MENU button to return Main menu.

Technical Specifications :	
Output power :	RMS 13W x 2
S/N ratio :	≥70dBA
Distortion :	≤1%
Frequency Response :	120Hz~18KHz
Driver unit :	Φ66mm / 4Ω
Power supply :	AC adaptor 12V/3A
Compatible with :	UPnP multimedia server
Working Temperature :	0°C~50°C
Unit size :	320mm (W) * 100mm (H) * 108mm (D)

Packing List:

- 1x Internet Radio Speaker IR D3
- 1x AC adaptor
- 1x 3.5mm Aux cable
- 1x User Manual