





THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF **STRUCTURED CABLE PRODUCTS** AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF **STRUCTURED CABLE PRODUCTS**

REV.	REVISED DESCRIPTION	DATE	CHECKED
A1	FIRST RELEASE	2016.05.17	
A2	Change is outside the cable for CL2 level	2016.06.22	

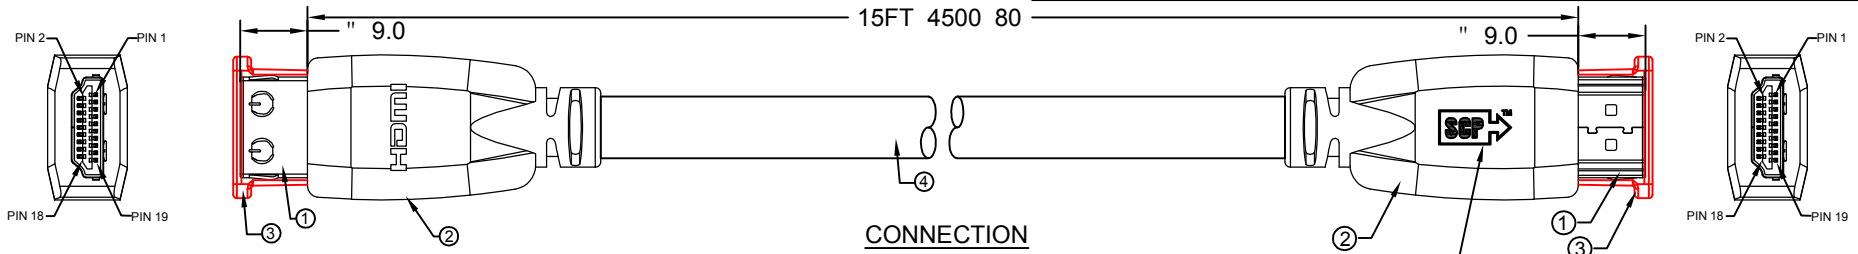

CONNECTION

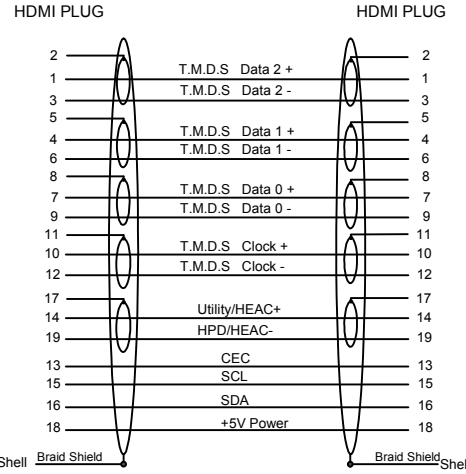

Pad Printing - White



Front



Back

Packing: 1PC / Bag

www.scpca5e.com

- ELECTRIC TESTING:**
 1. 100% OPEN & SHORT TESTING
 2. INSULATION RESISTANCE: 20 M
 3. CONDUCTOR RESISTANCE: ! 5
 4. VOLTAGE: 300V DC/0.1S

ITEM	SPECIFICATION
4	{{(1/0.404Bc+HDPE)*1P+1/0.404Tc+AL/Mylar}*4P+(1/0.254Bc+HDPE+1/0.254Bc+AL/Mylar)*1P+(1/0.404Bc+HDPE)*4C+Filler+AL Mylar+24/10/0.10(85%)Tc Braid}*1C OD=8.0 0.15MM Jacket=Black PVC Jacket with White Text :PREMIUM HIGH SPEED HDMI R(logo) CABLE WITH ETHERNET E148115-D (UL) TYPE CL2 SHIELDED 75! C 26AWG/12C+30AWG/2C
3	Plastic Cap-Transparent(2312110024)
2	PVC - Black 60P (31401012060)
1	HDMI Plug - Gold Plated (3033700ACG)

TOLERANCES UNLESS OTHERWISE STATED

X.	= ± 1
.X	= ± 0.2
.XX	= ± 0.1

Structured Cable Products™ Quality Installations Deserve Quality Products	
ERP NO.:	Sample No.
DOC No.:	REVISION A2
CUSTOMER:	UNIT mm
CUSTOMER P/N:	990UHD-15
DESCRIPTION	Premium 2.0 HDMI A/P - HDMI A/P 26#
APPROVAL	CHECKED
	DRAWN CJJ
	SCALE NO
	PAGE NO 1/1
	DATE 2016.06.22